




Volume IV

Appendix F.4

ET Cryoinsulation

ET cryoinsulation Power Point Slides presented 7 April 2003 at the CAIB Public Hearing: ET cryoinsulation, by Lee Foster and Scotty Sparks, MSFC.

THIS PAGE INTENTIONALLY LEFT BLANK

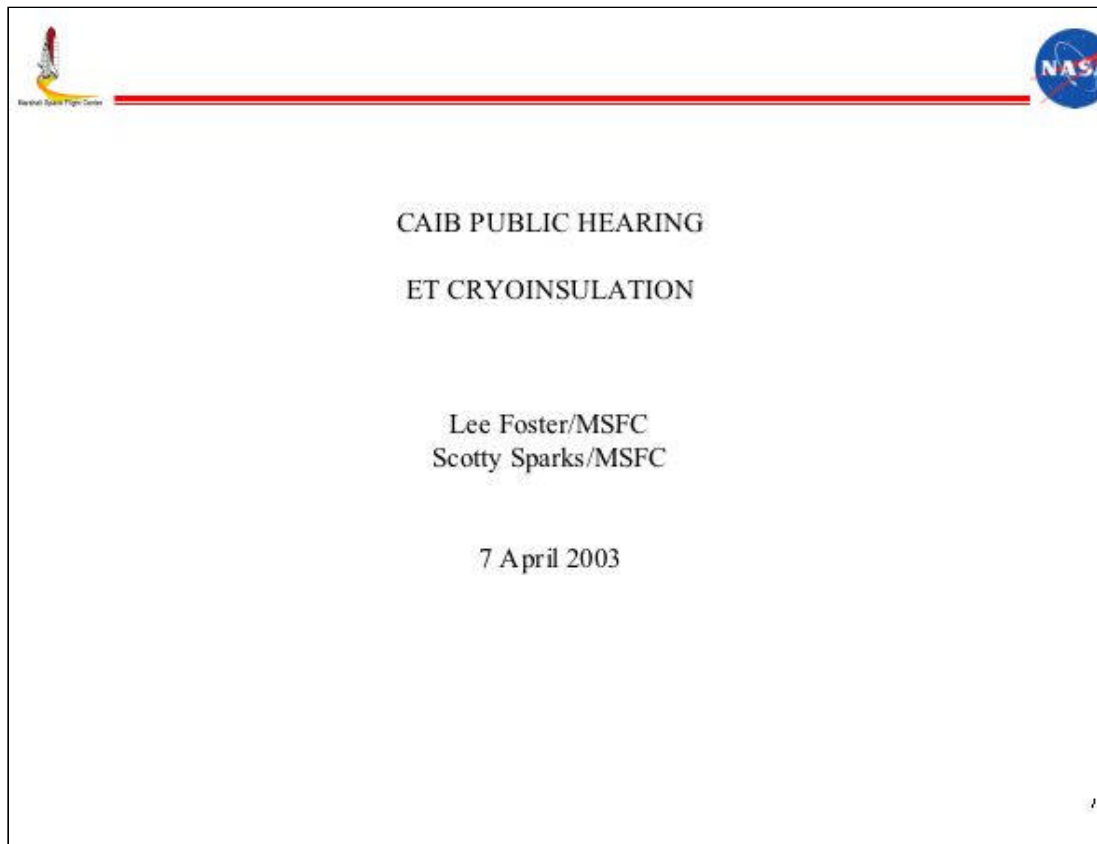**CAIB Public Hearing: ET Cryoinsulation***Lee Foster / MSFC**Scotty Sparks / MSFC**April 7, 2003*



CAIB PUBLIC HEARING: Cryoinsulation



Objectives

Inform the CAIB and the Public of:

Cryoinsulation Purpose & Characteristics

Material Development & Qualification

Flight Environments

Debris History & Past Issues

Efforts to Reduce Debris

Recent Observances



CAIB PUBLIC HEARING: Cryoinsulation Characteristics



Purpose of Cryoinsulation

Prelaunch

- Minimizes ice formation
- Maintain LO₂ and LH₂ boil-off rates at acceptable levels
- Eliminates air liquefaction (cryopumping)
- Contributes to propellant loading accuracy and increased propellant densities


Ascent

- Provide protection from flight heating environments (Foam materials in low heating regions and ablators/composites in high heating regions)
 - Aerodynamic heating
 - Plume-induced heating
- Minimize effects on structure of aerodynamic loading
 - Static airloads
 - Unsteady aerodynamic effects

Reentry

- Assure safe separation distance from Orbiter and proper breakup altitude

J

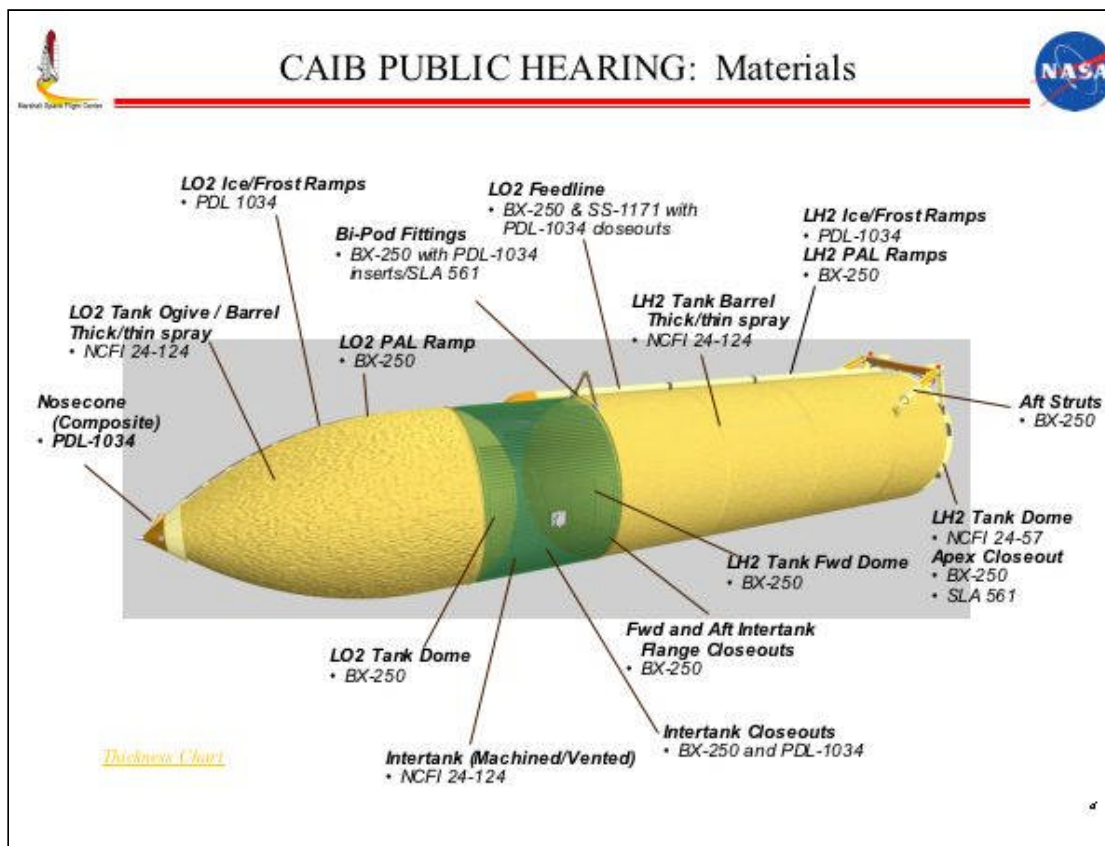



CAIB PUBLIC HEARING: Cryoinsulation Characteristics





Levels of Structure


1. Polymeric Structure

$$\text{HO}-\text{R}_1-\text{OH} + \text{OCN}-\text{R}_2-\text{NCO} \rightarrow \text{OCN}-\text{R}_2-\left[\text{NH}-\text{C}(=\text{O})-\text{O}-\text{R}_1-\text{O}-\text{C}(=\text{O})-\text{NH}-\text{R}_2\right]_n-\text{NCO}$$

Polyol Diisocyanate Polyurethane


2. Cellular Structure
3. Knitline Geometry
4. Substrate Geometry

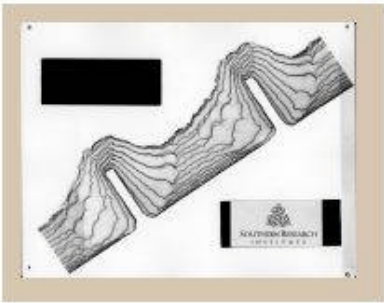

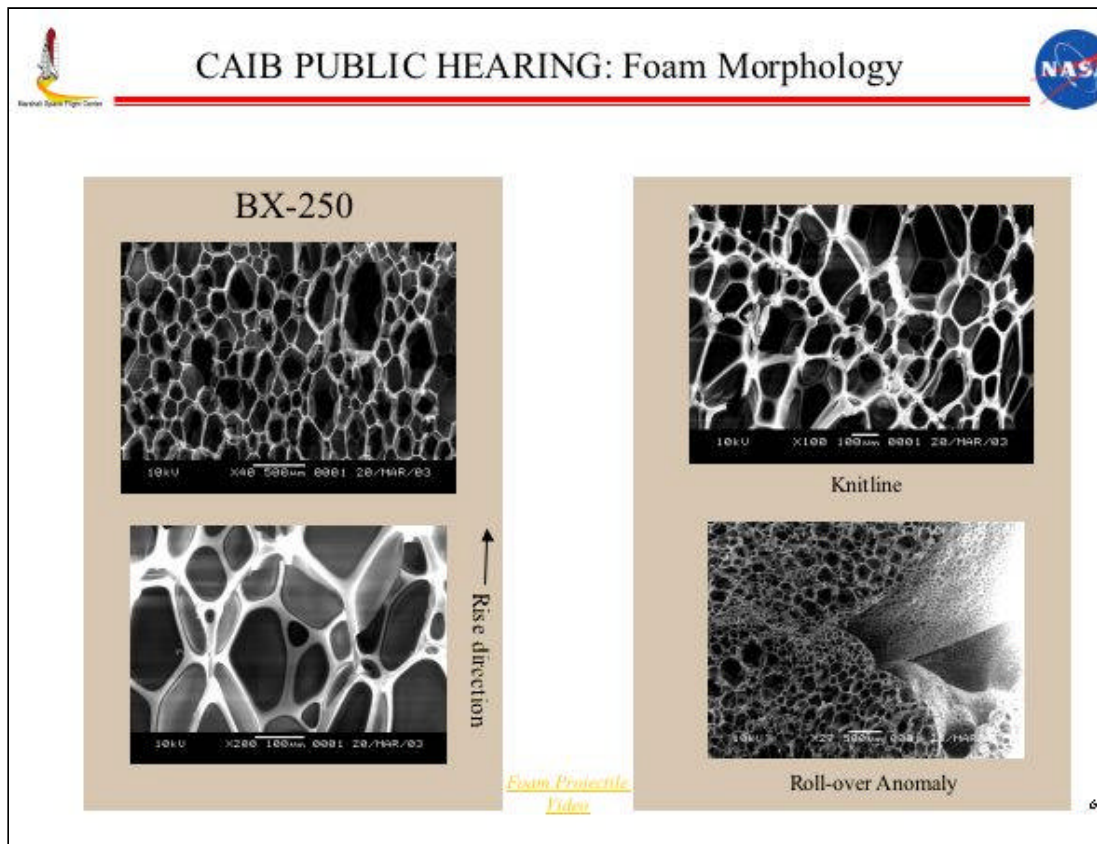


CAIB PUBLIC HEARING: Chemistry





Chemical Reactions

Primary Polyurethane Reaction

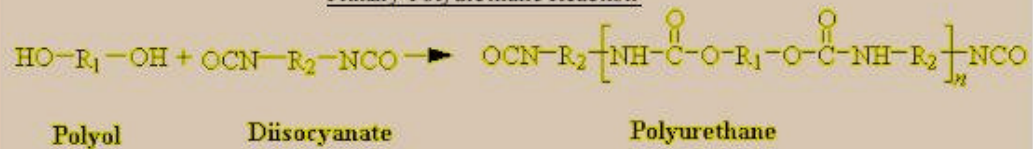

Polyisocyanurate Reaction

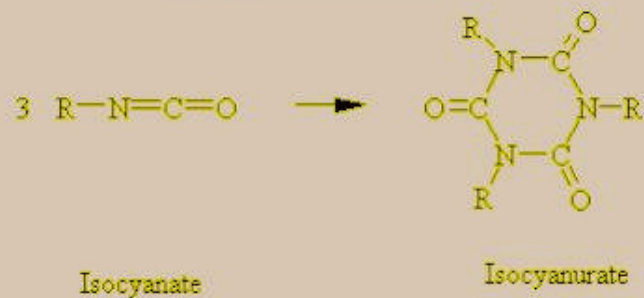

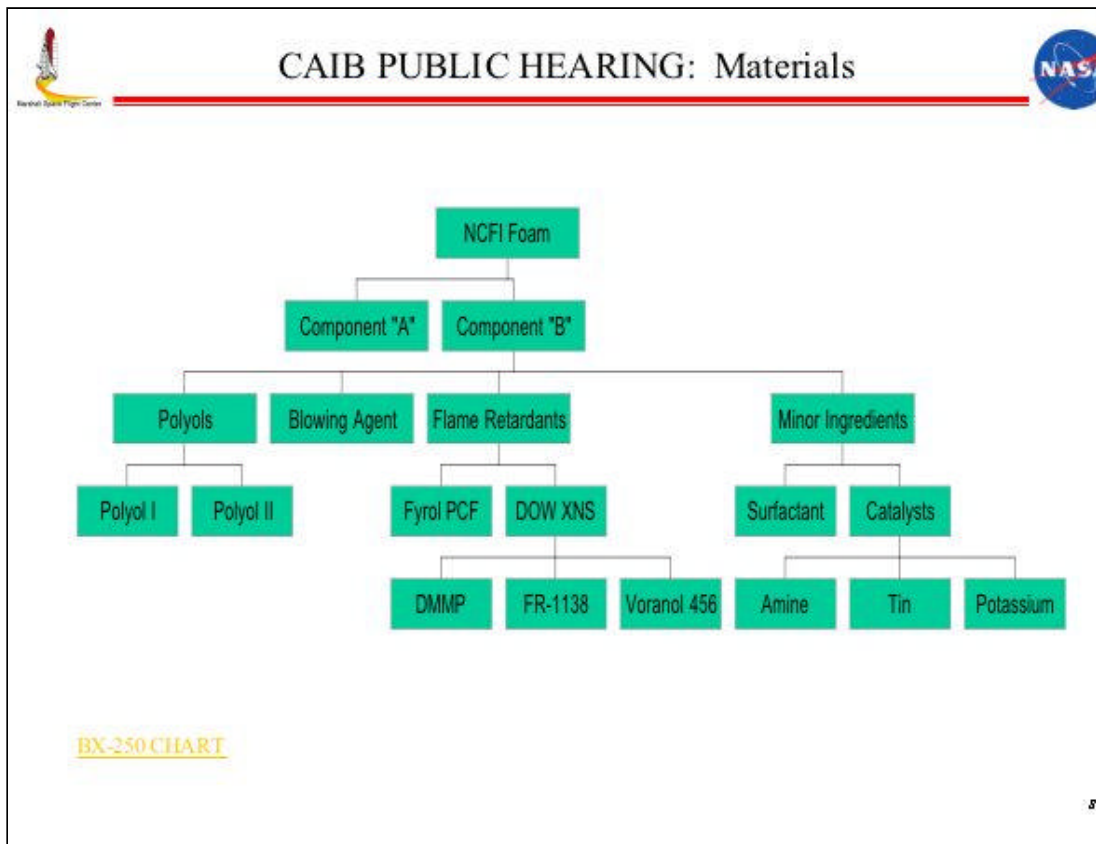

COLUMBIA

ACCIDENT INVESTIGATION BOARD

CAIB PUBLIC HEARING: Properties												
Room / Property	(BCRC) NCFI 34-134 (CRC) CPR 488			(BCRC) NCFI 34-57 (CRC) NCFI 33-65			(BCRC) PDL 1004 (CRC) PDL 4004			(BCRC) EX265 (BCRC) 33-1171 (CRC) EX250		
(% of total foam)	(77%)			(7%)			(1%)			(14%)		
Application	LB3, L02, L1T side wall			LB3 aft dome			Closeouts and repairs			LB3 forward dome, L02 aft dome, closeouts		
Process	Spray			Spray			Pour/Mold			Spray		
Description	Isocyanurate			Isocyanurate			Urethane			Urethane		
Req. min. b	Spec. Req.	Typ. Prop.	Fl. Prod.	Spec. Req.	Typ. Prop.	Fl. Prod.	Spec. Req.	Typ. Prop.	Fl. Prod.	Spec. Req.	Typ. Prop.	Fl. Prod.
Density PCF	2.0-2.6 2.1-2.6	2.25 2.4	Lighter ¹	2.6-3.1 2.6-3.1	2.97 2.98	Heavier ¹	2.3-3.1 2.3-3.1	2.6 2.6	none ¹	1.8-2.6 1.8-2.6 1.8-2.6	2.4 2.4 2.4	none ¹
Tensile 1LT (psi)	30 min. 35 min.	34 54	19	40 min. 40 min.	32 71	19	30 40	113 104	19	35 min. 35 min. 35 min.	30 53 75	19
Tensile 423°F (psi)	N/A ²	34 41	19	N/A	42 47	19	N/A	30 49	19	N/A	73 62 53	19
Tensile 300°F (psi)	N/A	32 37	19	N/A	32 45	19	N/A	713 53	19	N/A	53 364 47	19
Compression (psi)	25 min. 24 min.	33 40	20	35 min. 35 min.	49 51	20	30 30	61 42	20	24 min. 24 min. 24 min.	43 30 42	20
Decomposition 2 BTU/ft ² /sq. sec. (hr/sec)	N/A	0.0094 0.0163	to meet ³	N/A	0.00992 0.00992	to meet ³	N/A	0.0303 0.0235	to meet ³	N/A	0.031 0.0173 0.024	to meet ³
Thermal Cond. (in BTU/ft ² /hr/°F)	0.025	0.017 0.017	none ⁴	0.0225 0.0153	0.0130 0.0156	to meet ³	0.016 0.016	0.015 0.012	to meet ³	0.015 0.013 0.011	0.015 0.013 0.011	to meet ³
Cryogenic (ksi)	60@-423 60@-423	60@-423 60@-423	2003	50@-423 60@-423	60@-423 60@-423	2003	N/A 60@-423	60@-423 60@-423	2003	N/A 60@-423	60@-423 60@-423	2003

¹N/A - Not Applicable ²-200°F Values ³@ 4 BTU/ft²/sq. sec ⁴Max density 3.1 is dome area allowed
⁵@ -200°F ⁶meets new vs. old ⁷Radiant heating ⁸2.4 - 2.8 PCF for thickness



CAIB PUBLIC HEARING: Properties

ET CRYOINSULATIONS	ACCELERATED EXPOSURE
NCFI 24-124 (HCFC-141B)	0.12% Weight Gain of Machined Foam (7 Days @125 F & 95% RH)
BX-250 (CFC-11)	0.16% Weight Gain of Machined Foam (7 Days @125 F & 95% RH)
SS-1171 (HCFC-141B)	0.42% Weight Gain of Machined Foam (7 Days @125 F & 95% RH)
PDL-1034 (HCFC-141B)	0.83% Weight Gain of Machined Foam (7 Days @125 F & 95% RH)

* Materials on metal substrates (1' X 1') during accelerated exposure

10



CAIB PUBLIC HEARING: Qualification Activities



Testing Performed Throughout Qualification Activities

Several lots of material were tested to characterize the material variability and process repeatability.

Physical Properties	Mechanical Properties	Thermal Properties
Bond Tension (-423 to 300 °F)	Cryoflex (-423 & -320 °F)	Thermal Conductivity (-423 to 200 °F)
Flatwise Tension (-423 to 300 °F)	Monostrain (-423 to 400 °F)	Oxygen Index
Plug Pulls	Torsion Shear	Flammability
Density	Poisson Ratio	Specific Heat & TGA
Compression		Aero-recession (Hot Gas)
		Thermal-Vac

Major Flight Acceptance Tests: Wind Tunnel (aero-recession for ascent)

Plasma Arc (Entry recession)


PAL Ramps


Aft Dome Test (Stop Sign)

Combined Environments (combined lift-off environments)

Chart presented on
2/1/96

//

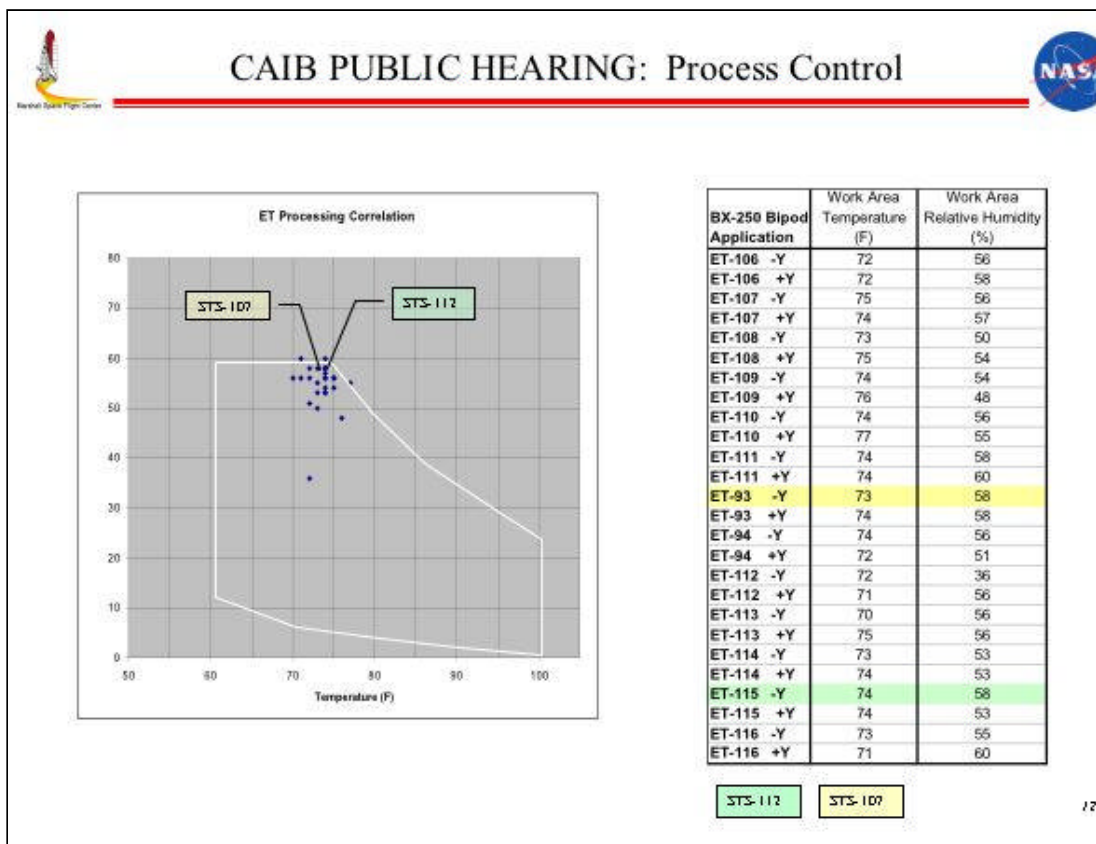

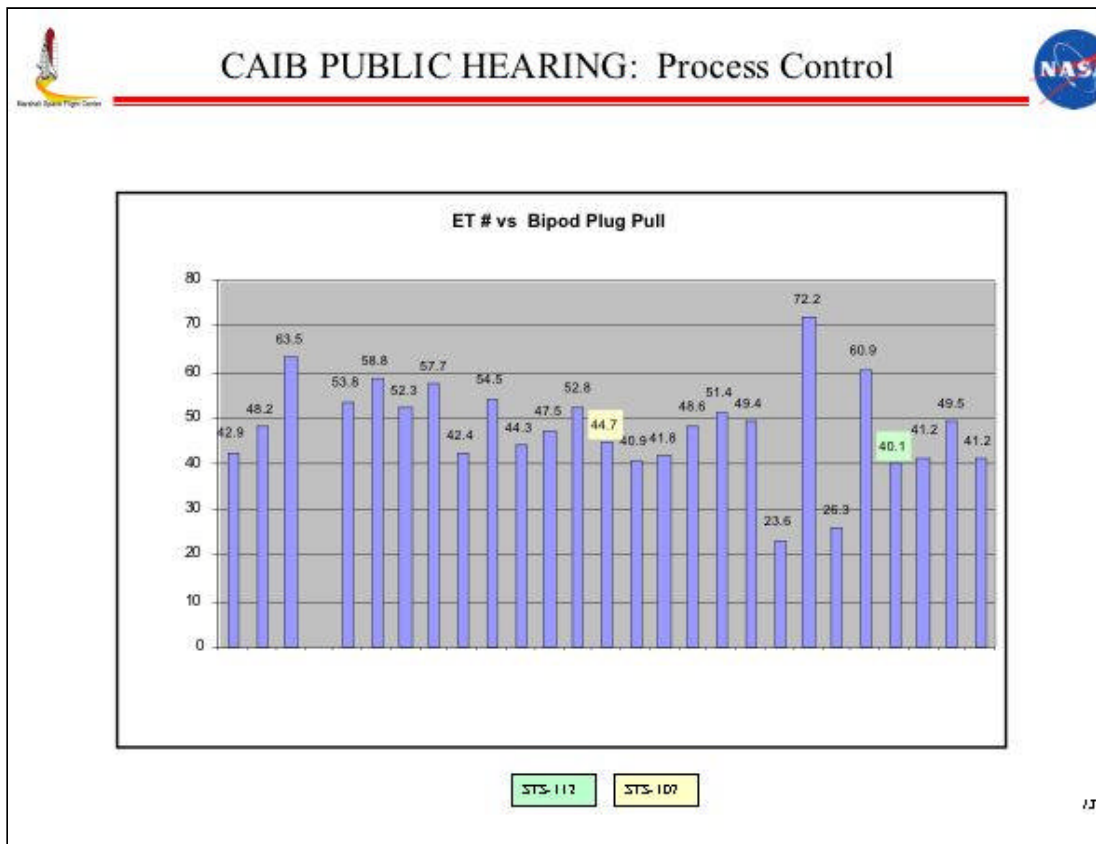



CAIB PUBLIC HEARING: Material Changes





BX-250 to SS 1171 to BX-265

- Original ET material, BX-250, Chosen for Ramp/Closeout Applications
- 1993 - CFC 11 blowing agent manufacture discontinued (accelerated EPA date)
- 1995 - SS-1171 (w/HFC 141b) chosen to replace BX 250
- 1995 - Secured available stock of CFC 11 for use with remaining BX 250
- 1995 - FR 1138 Flame Retardant discontinued in SS-1171 foam – acquired Dead Sea Bromide as replacement
- 1998 - Production issues identified with use of SS 1171 in F/A & Bldg 420, decision made to continue BX 250 usage
- 1999 - SS 1171 low strength failure analysis and subsequent acquisition by BASF; usage on ET discontinued
- 2000 - Mondur Dark Isocyanate used in BX 250 phased out of production (secured supply till BX 265 implemented)
- 2001 - BX-265 qualified to replace BX-250
- 2002 - BX-265 Foam Implementation on ET-117 (subsequent repair on ET-116 at KSC)
- 2003 - EPA phase out of HCFC 141b initiated (Waiver Required for Procurement in US)
- 2003 - Waiver approving NASA's HCFC 141b exemption allowance granted on March 5, 2003.

1996 CFC to HCFC Presentation

14

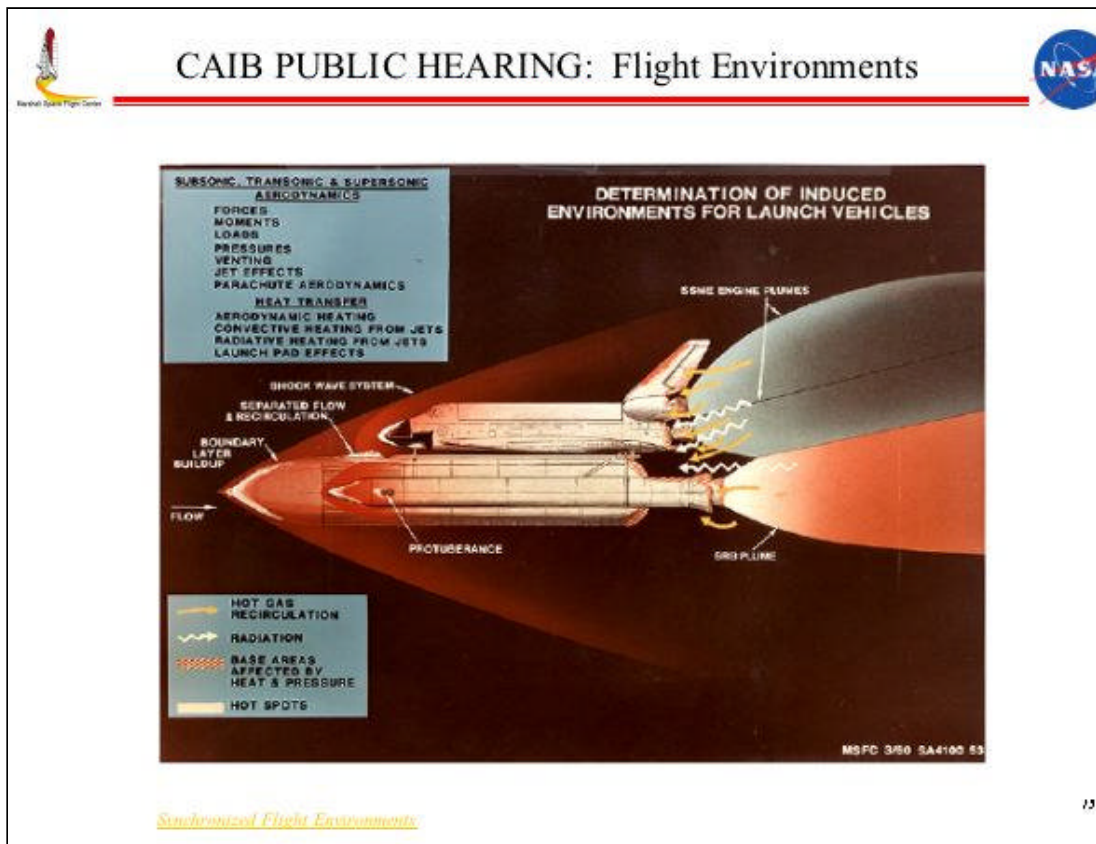

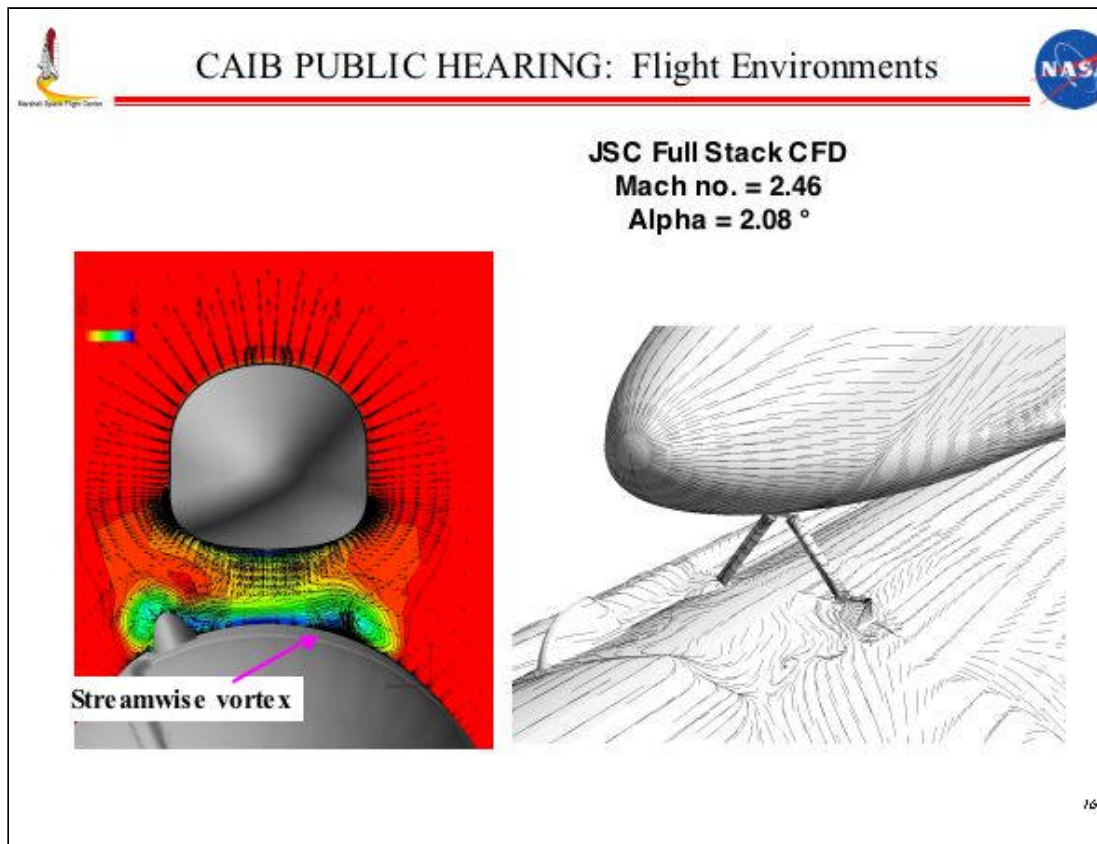



CAIB PUBLIC HEARING: History of Foam Loss




Data Commonly Available for Assessment of ET Debris Production

1. Ascent photographic coverage
2. ET-Orbiter separation photographic coverage
 1. Umbilical well cameras
 2. Crew hand held cameras
3. Post-flight Orbiter tile damage


Additional Data Collection for Assessment of ET Debris Production


1. SRB ascent camera coverage (intertank thrust panel)
2. ET ascent camera (general view aft)


17

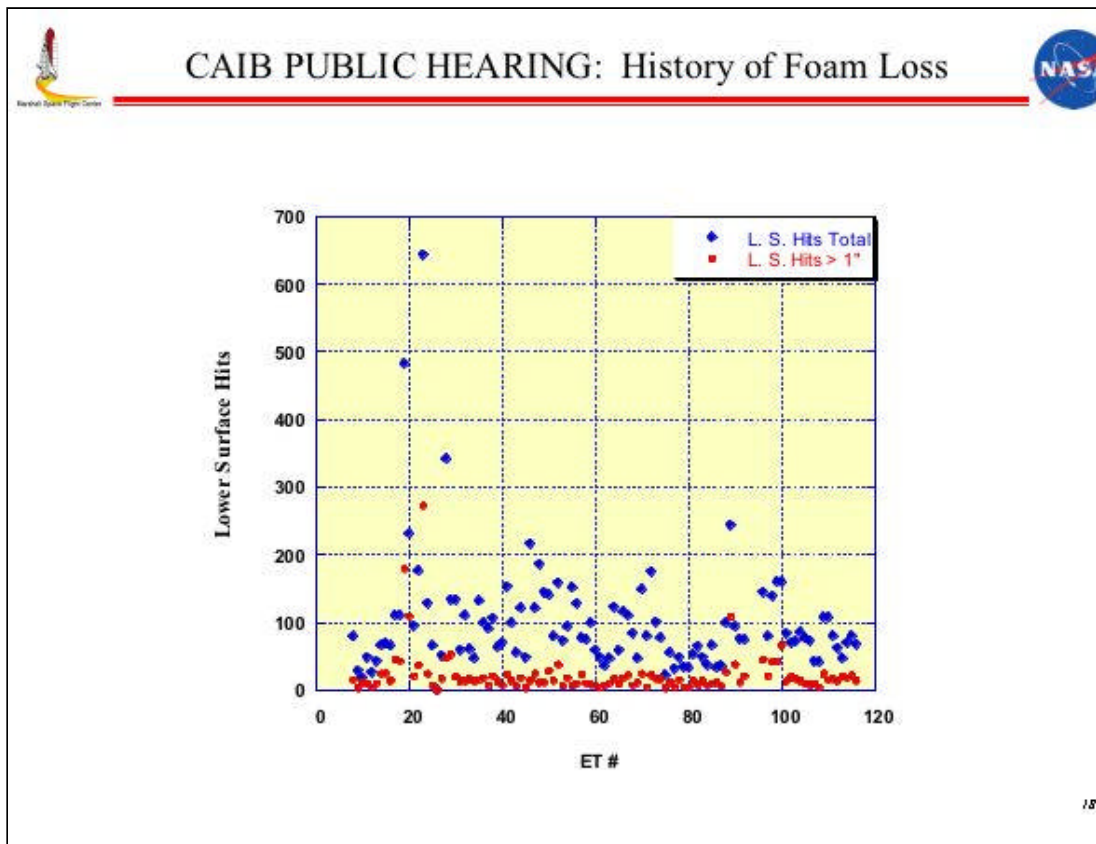



18

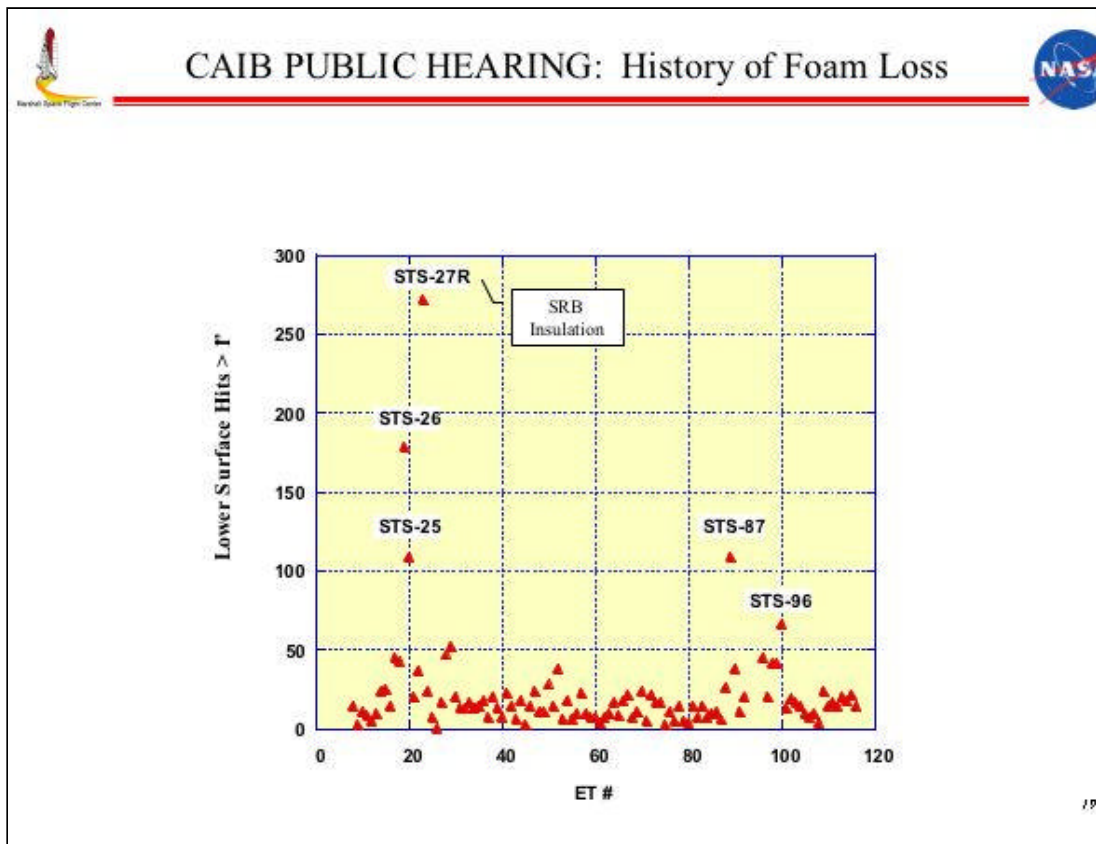


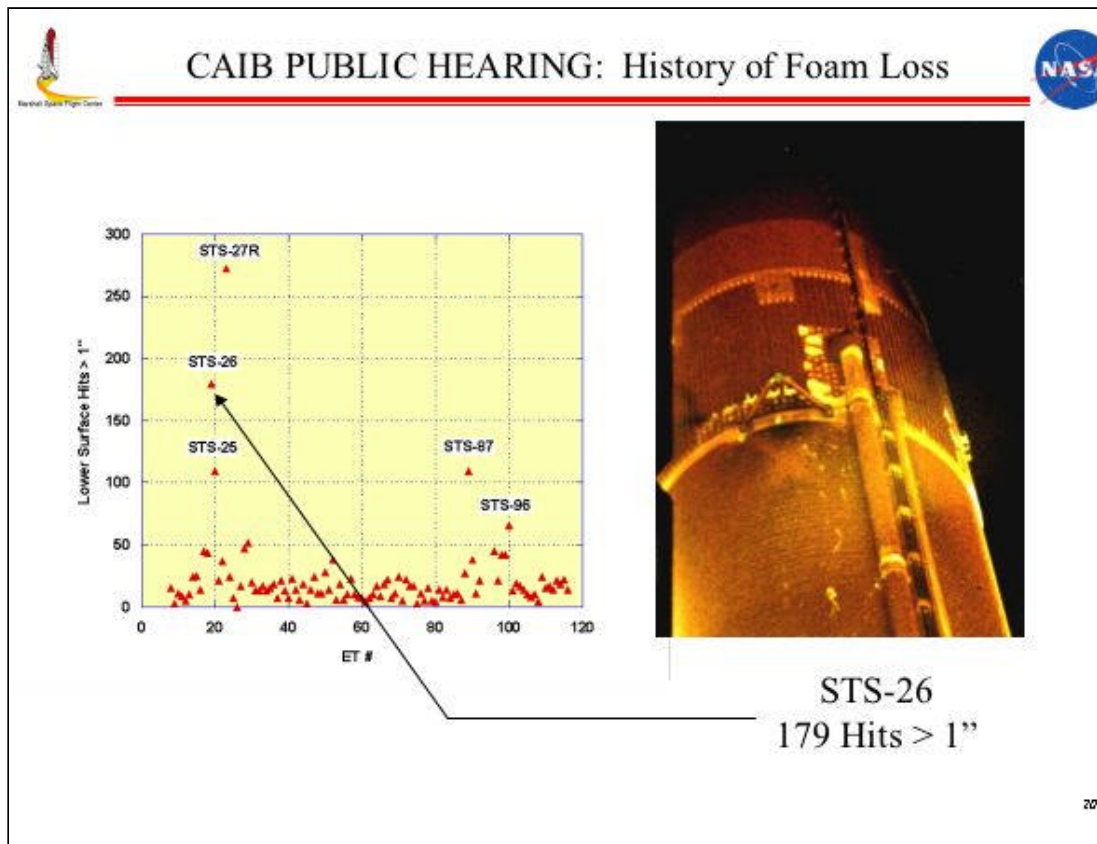

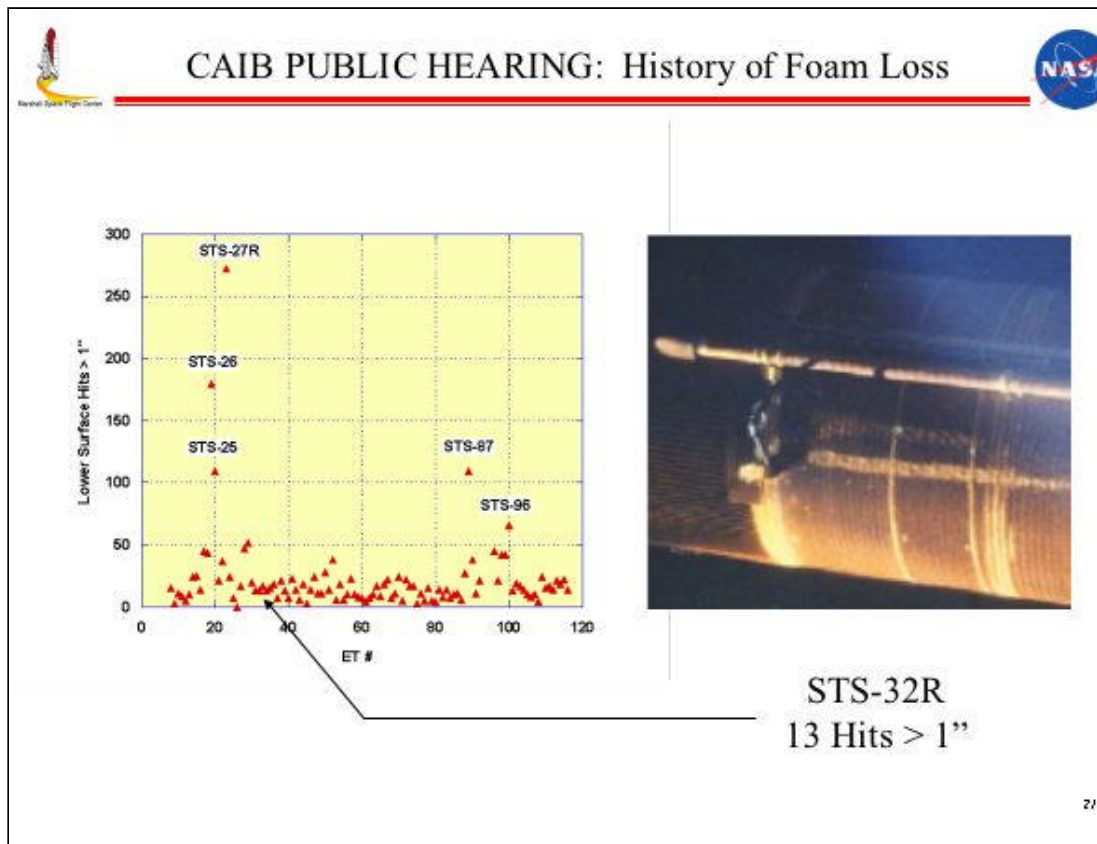

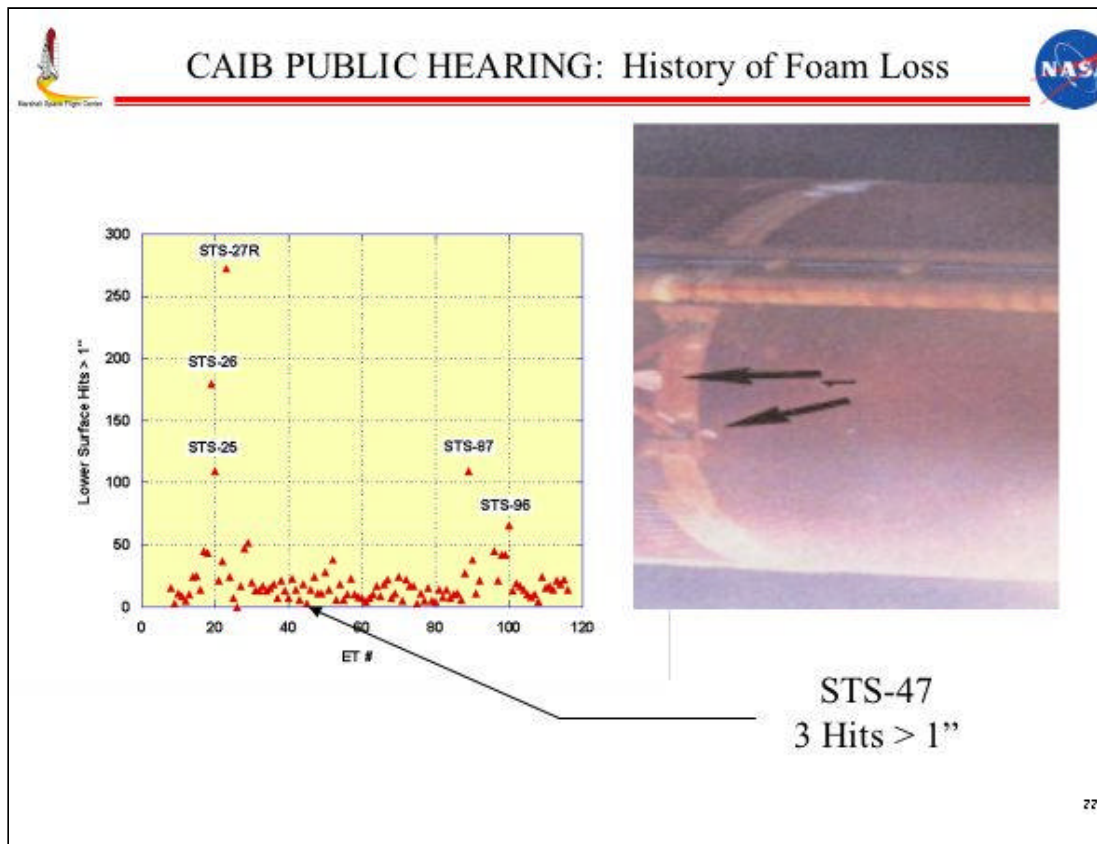

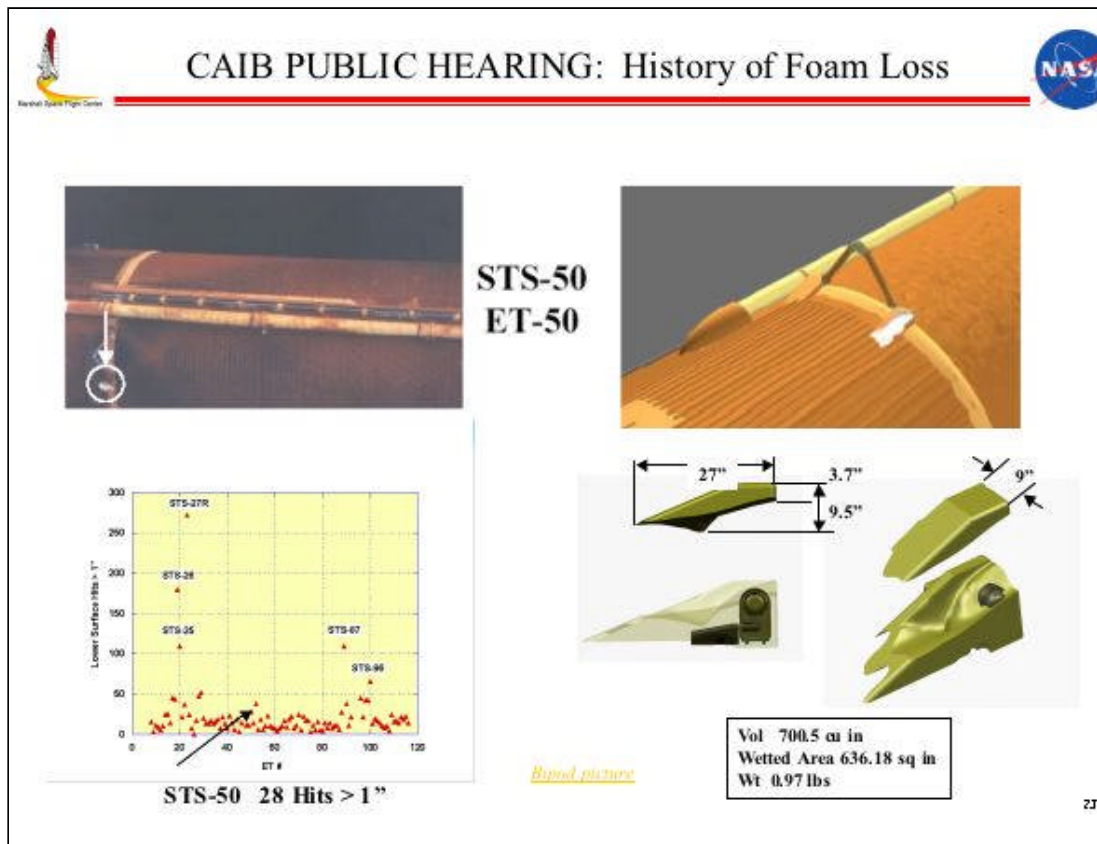

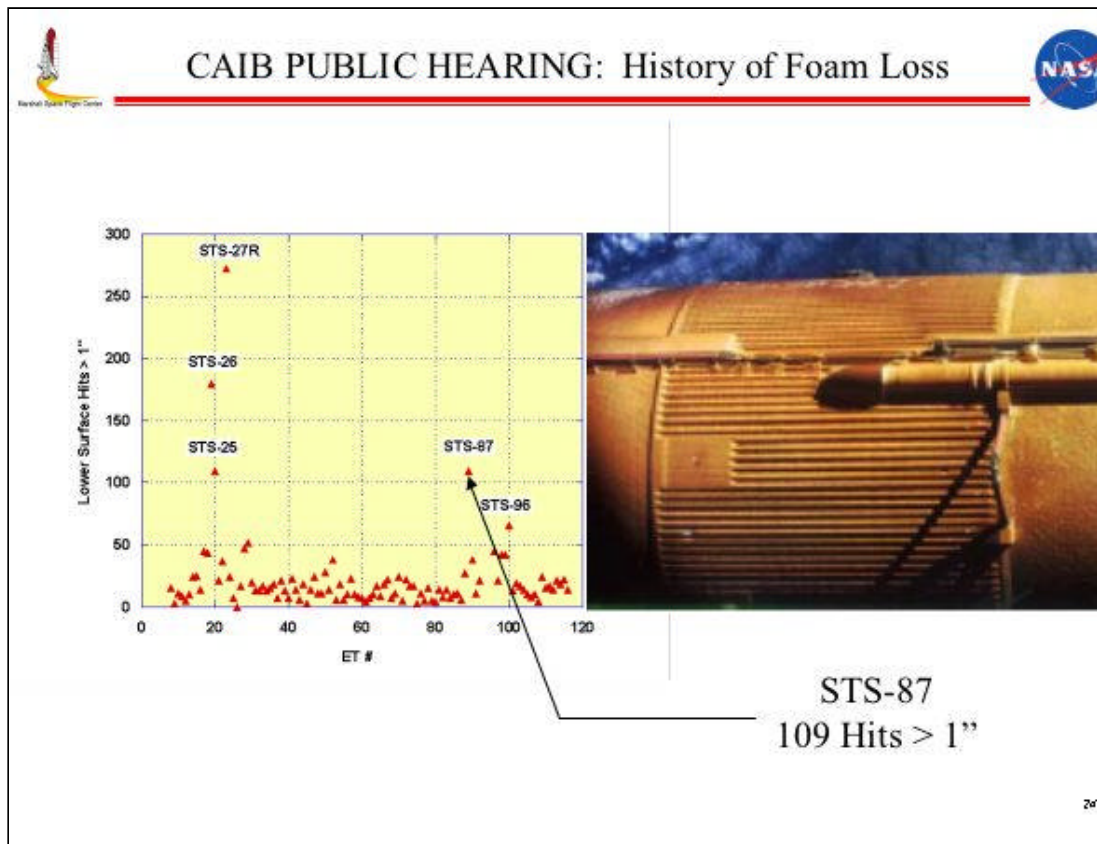



CAIB PUBLIC HEARING: Efforts to Reduce Debris



STS	ET	Launch Date	Precipitating Event / Concern	Efforts to Reduce Debris
1	1	4/12/1981	Ice may form on instrumentation islands and become debris	Removed instrumentation islands on LO2 Tank to insure no ice debris
6	8 (LWT 1)	4/193	Block change to Lightweight Tank enabled design changes	Redesign of Bipod Ramp angle from 45° to 30° on LWT-7 Incorporated maximum repairable defect limits on Bipod ramp Incorporated improved fabrication procedures for LH2 tank cable tray ice frost ramps (two-step single-pour application versus one-step multi-pour process) Reduced SLA areas Deleted anti-geyser line Incorporated "two-tone" foam configuration on areas of the Intertank
27	21	8/14/1986	Large Intertank divots observed on STS-25 & STS-26	Corrective action (drilled holes) applied in two-tone areas to preclude debris due to Isocyan bondlayer issues
32R	32	1/9/1986	Intertank / Bipod divot observed on STS-32R	Added inspection to verify vent hole depth in two-tone areas
35	35	12/2/1986	Ten flange area divots observed on STS-35	Incorporated process improvements to reduce potential for void formation around the flange bolts
50	50	6/25/1992	Jack-pod area divot observed on STS-50	Changed jack-pod clecoout method
46	48	7/31/1992	Intertank / Bipod divot observed on STS-50	Added more vent holes around bipod ramps in two-tone areas
54	51	1/13/1993	Previous problems with two-tone Intertank foam	Incorporated two-gun spray foam application on Intertank to replace two-tone foam
56	54	4/8/1993	Ten large, shallow divots on -Z Intertank Acraega	Enhancement of Process to reduce roll-over and crevicing
87	89	1/15/1997	Increased number of Orbiter tile hits	Reduced foam thickness Incorporated "vent" holes
112	115	16/7/2002	Bipod foam loss on STS-112	Proposed corrective action (to be presented 2/6/03): remove SLA from under the foam application

23



CAIB PUBLIC HEARING: Cryo-effects




• Cryopumping Mechanism

- Transformation from a gas to a liquid at cryogenic temperatures
- Gases are condensed within a void or porous material at low temperatures
- Air in Cavities or Porous Material (SLA-561) Liquefies When in Contact With Structure Below -297°F for Oxygen and -320°F for Nitrogen
- Pressure is Reduced Locally Due to Gas to Liquid Volume Change and More Air Will be "Sucked" Into Area
- Process Continues Until Cavity or Porous Material is Filled With Liquid Air

• Consequences of Cryopumping

- No Detrimental Effects While Structure Remains Cold
- When Structure Warms, Liquefied Air Returns to Gaseous State With Local Pressure Increase
 - Gas Can Escape With No Detrimental Effect if Leak Path Large – Condensation Cloud May Be Visible at Leak Exit
 - Pressure Can Crack TPS and Escape With No Divots – Condensation Cloud May Be Visible
 - Pressure Can Cause Divot if Leak Path Small

Cryopumping

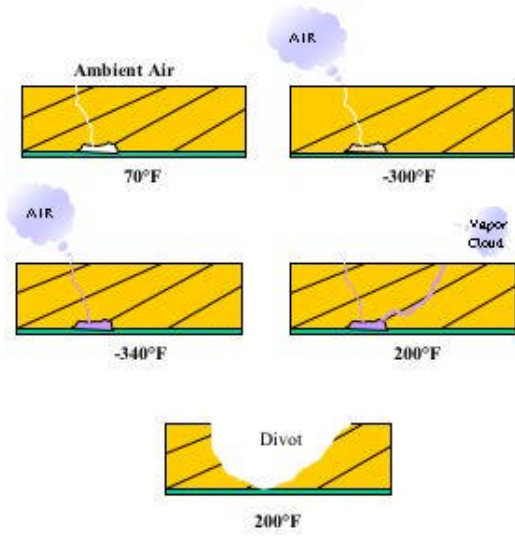


26

CAIB PUBLIC HEARING: Cryo-effects


Postulated Cryo-ingestion





Bipod Schematic

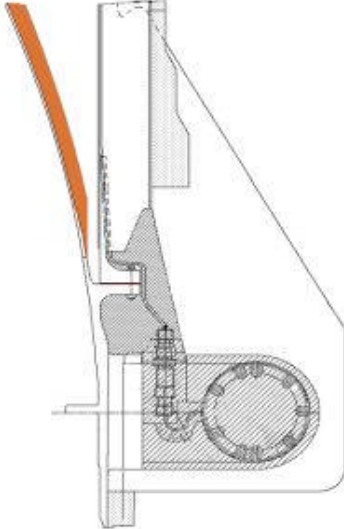


27

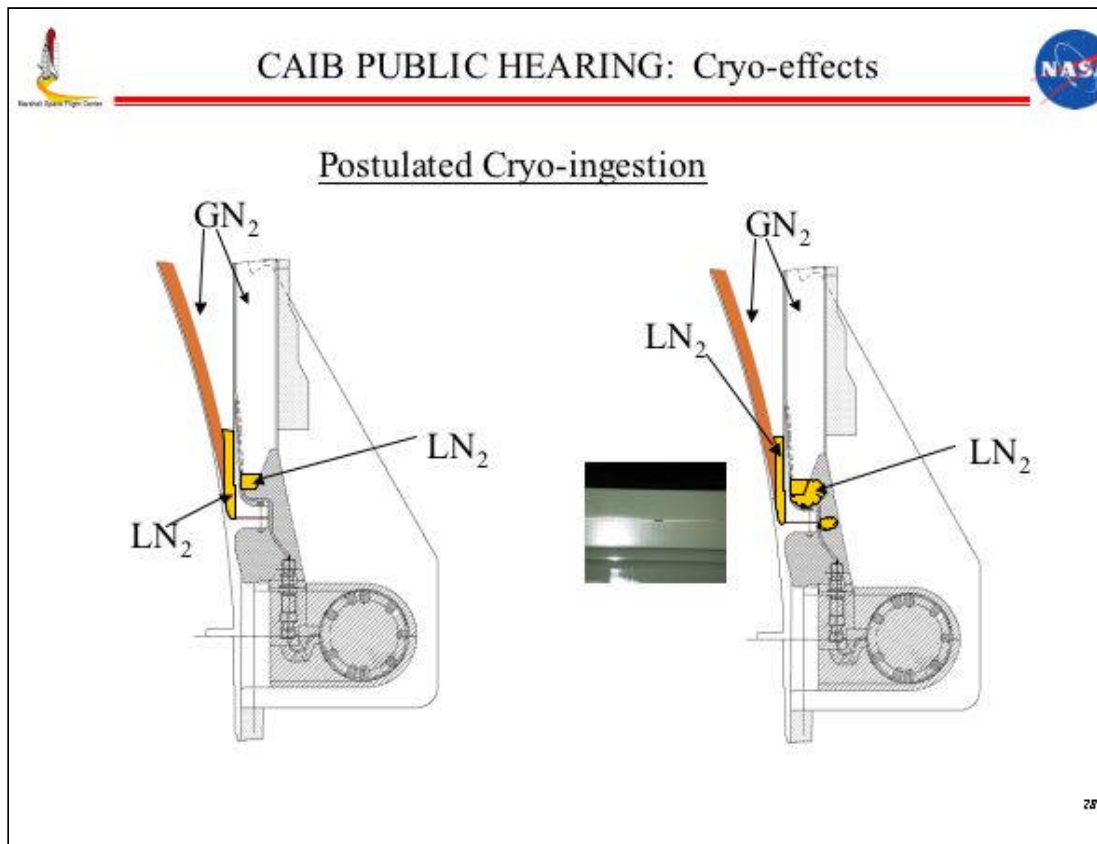

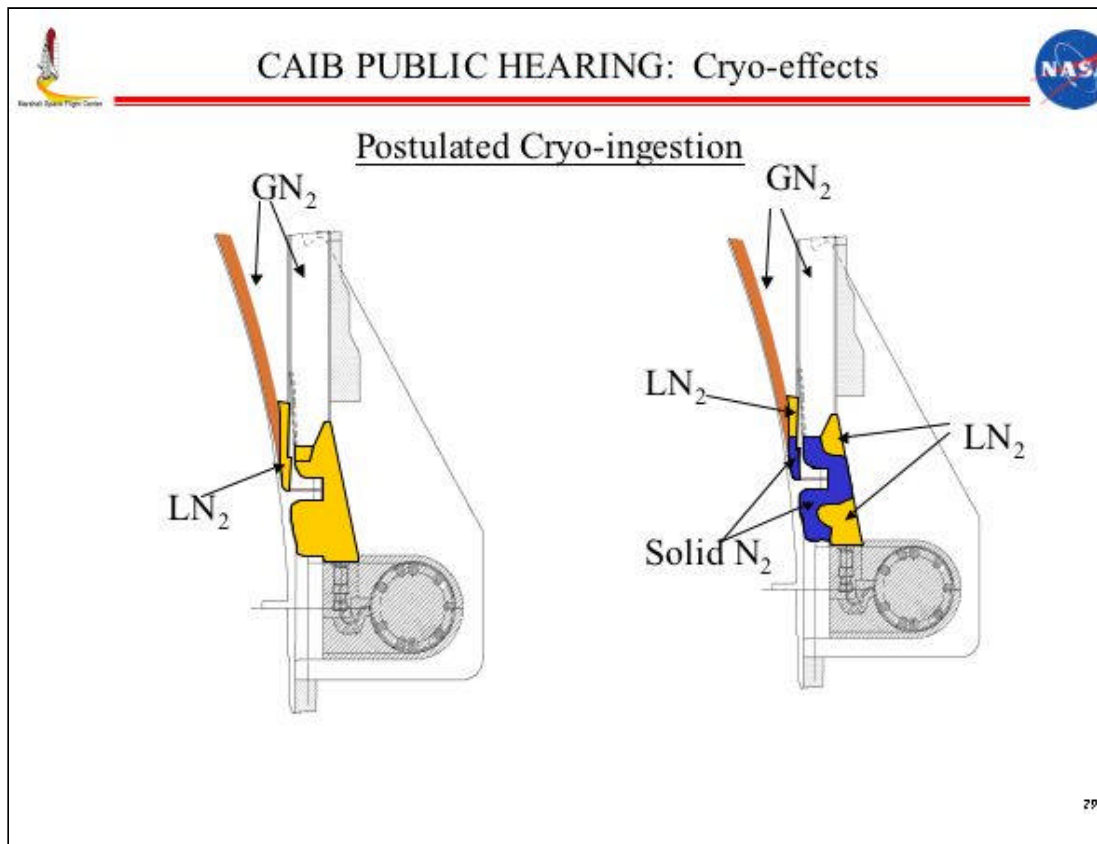

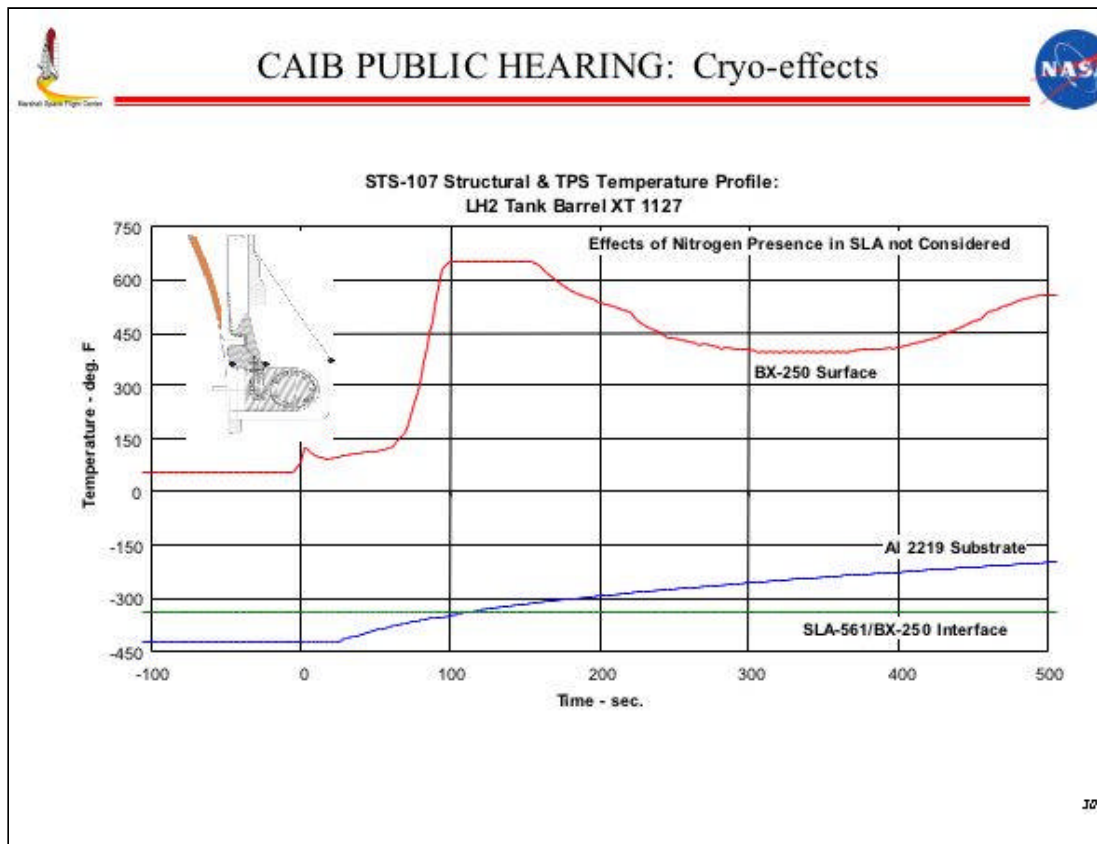

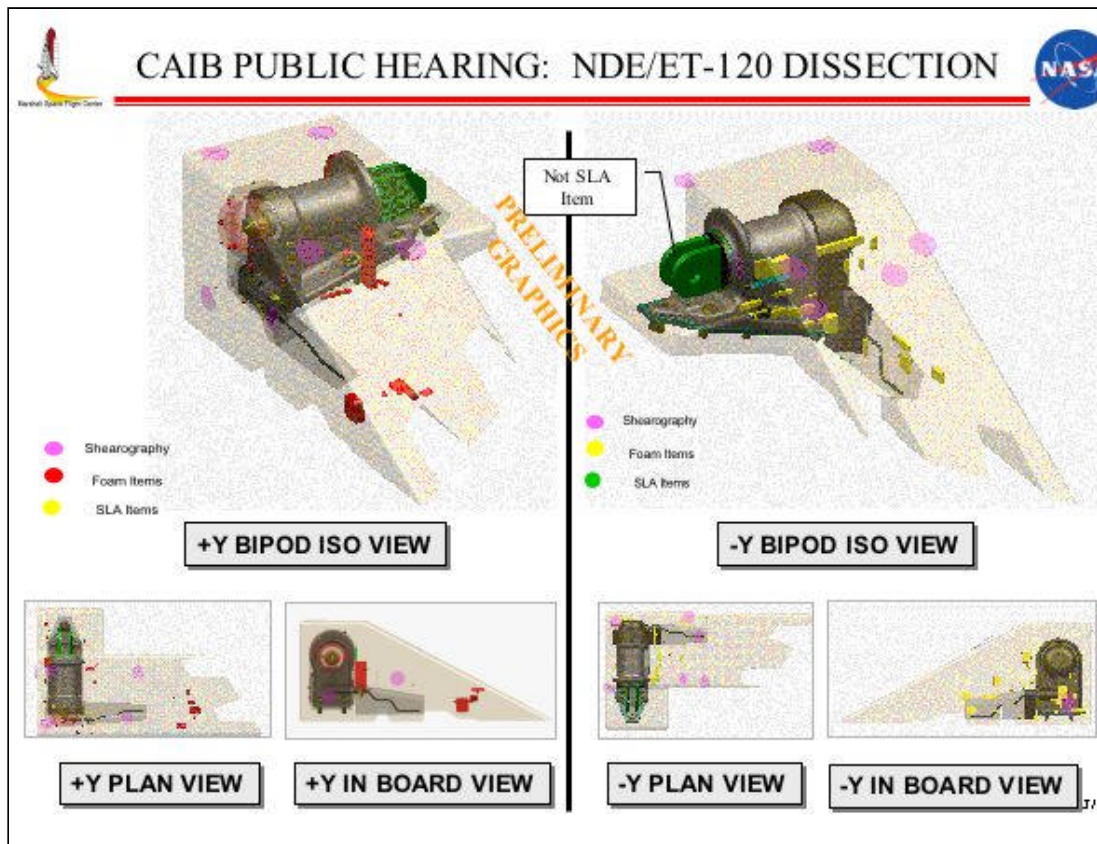



CAIB PUBLIC HEARING: History of Foam Loss



STS-7/ET-6 - All four
foams CFC-11



STS-112/ET-115 - Three
HCFC 141b foams with
one CFC-11 foam

STS-112/ET-115 - Foam loss on
bipod - CFC-11


32



CAIB PUBLIC HEARING: Backup Charts

BACKUP CHARTS

JJ

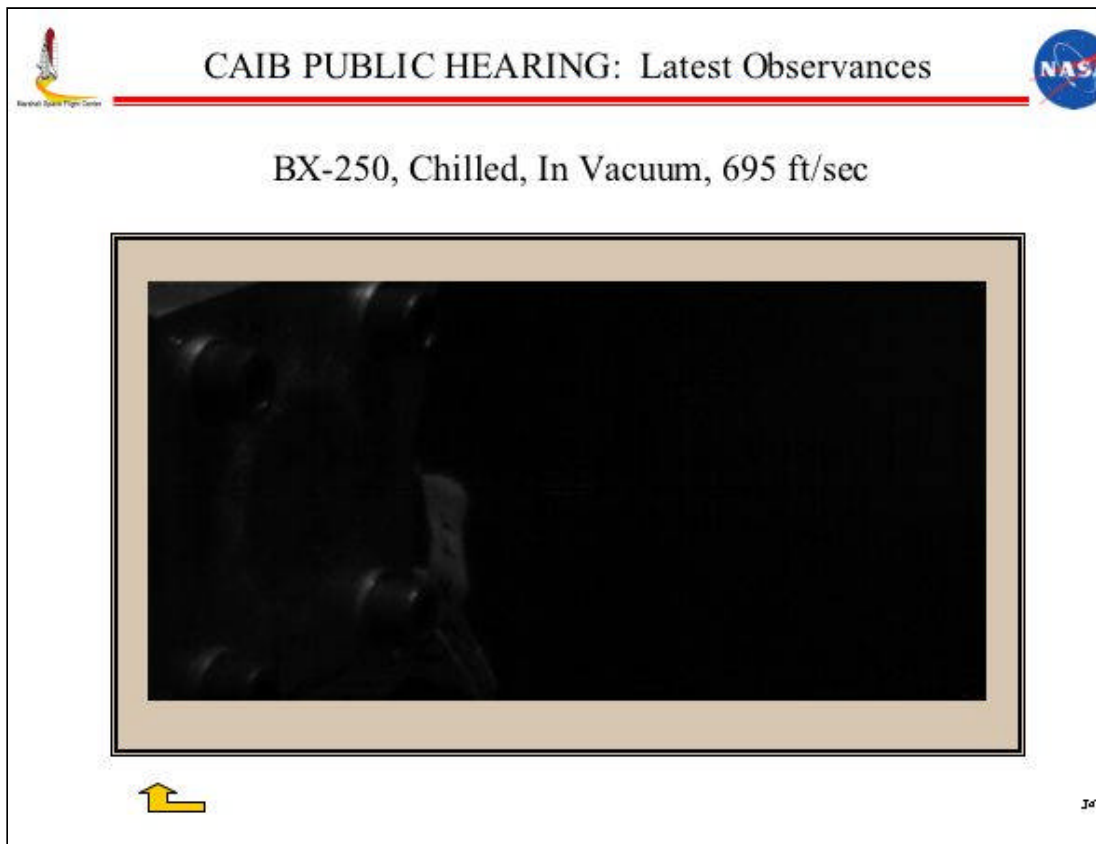



CAIB PUBLIC HEARING: ET Bipod Comparison



Performance Data	ET-93	ET-94	ET-112	ET-113	ET-114	ET-115	ET-116
Bipod	--	--	--	--	--	--	--
Mati	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250
+ Y Plug Pull data	40.90	48.6	49.4	71.2	60.9	41.2	41.2
+Y Core (15 psi Min)	74.1, 90.2, 79.5, 75.9, 94.6	51.4, 37.3, 41.2, 48.7, 44.0	54.8, 42.8, 49.5, 39.8, 48.3, 51.6	66.7, 58.2, 59.2, 63.4	46.3, 52.2, 44.9, 43.9, 52.4	49.0, 40.6, 56.3, 57.4	49.1, 46.1, 45.1, 43.3
Mati	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250
-Y Plug Pull Data	44.70	41.8	51.4	67.6	26.3, Retest = 48.4	40.1	49.5
- Y Core (15 psi Min)	46.1, 38.0, 40.7, 36.8, 43.4, 47.5	72.9, 56.9, 58.0, 62.7	51.9, 43.8, 34.9, 29.8, 42.1, 39.1	53.1, 49.8, 70.5, 72.2	45.5, 41.4, 40.9, 34.2, 54.9	66.5, 72.0, 61.8, 65.4	53.7, 41.9, 50.3, 39.7

JJ



CAIB PUBLIC HEARING: ET Bipod Comparison



Performance Data	ET-117	ET-118	ET-119	ET-120	ET-121	ET-122	ET-123
Bipod	--	--	--	--	--	--	--
Matl	BX-250	BX-250	BX-250	BX-250	BX-265	BX-265	BX-265
+ Y Plug Pull data	62.6	42.6	51.5	28.3 Retest = 61.3	37.6	56	44
+Y Core (15 psi Min)	51.1, 67.9, 73.8, 49.2, 60.6	53.9, 55.1, 64.5, 68.5	42.0, 52.3, 55.5, 55.1	48.6, 66.4, 53.3, 46.0, 47.1	56.7, 50.2, 46.0, 42.8, 35.7	43.2, 57.2, 30.3, 51.5, 33.7, 49.5	49.5, 47.3, 48.9, 47.9, 47.1
Matl	BX-250	BX-250	BX-250	BX-250	BX-265	BX-265	BX-265
-Y Plug Pull Data	70.9	43.4	44.8	52.8	50	63.8	51.3
- Y Core (15 psi Min)	30.0, 47.3, 56.5, 46.2, 52.3	64.4, 42.4, 40.5, 70.9, 60.0	51.8, 60.8, 49.6, 64.4, 52.4	51.0, 49.1, 56.0, 51.7	37.7, 48.8, 58.7, 56.5, 48.1	35.8, 58.1, 41.0, 37.1, 42.0, 44.2, 36.5, 26.0	50.8, 58.2, 38.0, 25.0, 40.7

[Back to Chart](#)

J6



CAIB PUBLIC HEARING: ET LH₂/IT Flange



Performance Data	ET-93	ET-94	ET-112	ET-113	ET-114	ET-115	ET-116
LH₂ / IT Flange	--	--	--	--	--	--	--
Aft Matl	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250
Aft Lead-In Tensile	84	81.6	54.4	44.1	57.1	40.8	(1) 62.7 (2) 90.1
Aft Lead-Out Tensile	75.3	55	50.1	45	73.8	66	(1) 84.8 (2) 77.9
Fwd Matl	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250
Fwd Lead-In Tensile	86.4	84.7	67.5	67.1	50	68.6	84.6
Fwd Lead-Out Tensile	76.2	77.1	51.2	58.2	40.9	58.7	62
Performance Data	ET-117	ET-118	ET-119	ET-120	ET-121	ET-122	ET-123
LH₂ / IT Flange	--	--	--	--	--	--	--
Aft Matl	BX-250	BX-250	BX-250	BX-250	BX-250	BX-265	BX-265
Aft Lead-In Tensile	54.6	45.4	52.3 (1) 57.8 (2) 54.6	53	73.3	64.4	64.4
Aft Lead-Out Tensile	64.4	64.5	62.6 (1) 57.4 (2) 61.1	77.3	67.7	54.9	54.9
Fwd Matl	BX-250	BX-250	BX-250	BX-250	BX-250	BX-265	BX-265
Fwd Lead-In Tensile	55.7	65	62.9	48.7	58.1	68.3	71.9
Fwd Lead-Out Tensile	60.4	43.8	51.8	54.2	60.1	64.4	54.5

[Back to Chart](#)

37

COLUMBIA

ACCIDENT INVESTIGATION BOARD




CAIB PUBLIC HEARING: ET PAL Ramp Comparison



Performance Data	ET-93	ET-94	ET-112	ET-113	ET-114	ET-115	ET-116
LO2 PAL RAMP	...	...	...	...	...	...	...
Plug Pull data	75.2, 61.7	39.2, 58.5	71.1, 58.4	81.8, 61.5	56.3, 72.7	41.7, 38.5	49.7, 61.8
Matl	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250	BX-250
Core (15 psi Min)	69.8, 53.3, 56.6, 64.9, 73.7, 36.1, 47.6	(1) 54.3, 61.6, 61.0, 47.1, 55.6, 60.7 (2) 44.3, 55.7, 46.2, 41.0	(1) 55.9, 61.8, 62.9, 57.4, 70.5 (2) 55.6, 71.3, 68.3, 23.5, 47.3	(1) 47.7, 63.2, 59.8, 68.1, 76.0 (2) 37.8, 55.5, 58.8, 64.4, 57.7	(1) 67.6, 56.3, 52.4, 56.7 (2) 62.9, 51.6, 60.9, 66.3	(1) 48.1, 66.0, 63.0, 55.7 (2) 58.2, 51.8, 52.0, 50.0	(1) 63.8, 67.4, 71.5, 53.9 (2) 47.0, 52.6, 40.9, 59.8
Performance Data	ET-117	ET-118	ET-119	ET-120	ET-121	ET-122	ET-123
LO2 PAL RAMP	...	...	...	...	...	...	...
Plug Pull data	77.5, 63.5	44.5, 46.7	42.4, 40.9	58.2, 37.0	55.1, 22.5 Retest=5 7.5	59.6, 53.6	57.4, 41.8
Matl	BX-250	BX-250	BX-250	BX-250	BX-265	BX-265	BX-265
Core (15 psi Min)	(1) 51.5, 55.4, 39.9, 68.7, 47.5 (2) 49.9, 54.1, 55.5, 48.9, 60.7	(1) 92.6, 72.7, 39.0, 69.6 (2) 76.2, 73.8, 53.5, 49.8	(1) 26.8, 52.2, 39.8, 44.3, 53.7 (2) 36.7, 50.8, 44.6, 39.4, 41.3	(1) 50.8, 52.2, 50.0, 44.4 (2) 52.9, 53.1, 46.5, 53.3	(1) 36.6, 44.9, 33.6, 69.3, 54.8, 70.1 (2) 53.9, 49.3, 54.6, 57.1	(1) 61.7, 49.2, 56.0, 65.2, 51.0 (2) 67.6, 79.2, 66.9, 49.2, 44.3	(1) 45.8, 45.3, 36.7, 45.3, 30.7, 51.3 (2) 36.5, 49.8, 28.5, 43.1, 25.5, 44.3

[Back to Chart](#)
18

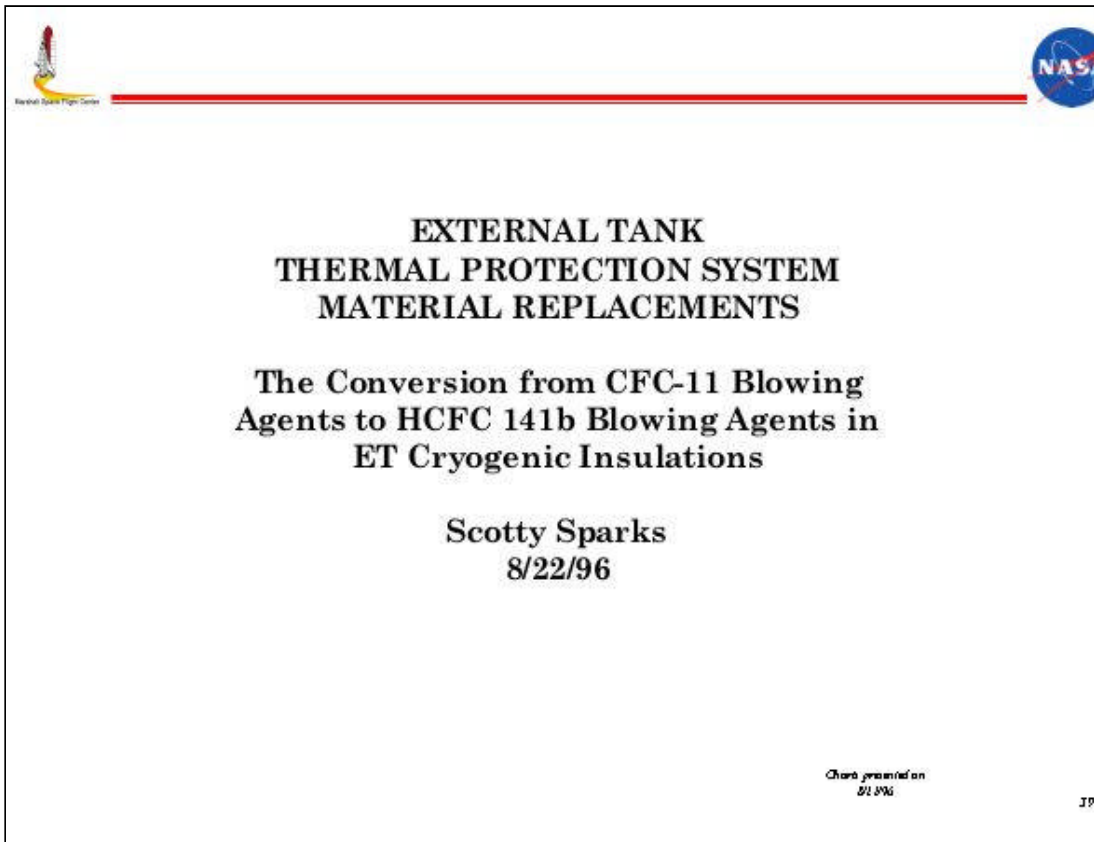



Regulation Chronology and Reaction



- 1978
 - U.S. ban of CFC's in aerosol sprays
- 1987
 - Montreal Protocol signed
- 1988
 - U.S. Senate approves Montreal Protocol
 - EPA adopts Protocol as Domestic Regulation
 - Protocol adds HCFC's and VOC's
- 10/88
 - Martin Marietta initiates activities to screen potential CFC alternatives
- 11/90
 - Clean Air Act Amendments enacted (CFC phaseout by 2000)
- 9/91
 - Martin Marietta selects best available CFC-11 replacement (HCFC 141b) and initiates action to implement in ET insulating foams by 1/1/96
- 2003
 - HCFC 141b phase out (U.S. only)

[Return to Chart](#)

Chart generated on
01/09/06

40



Intent and Implications



- It was the intent of NASA and Lockheed-Martin to select a CFC alternative blowing agent that would incorporate equal or superior function and performance to the thermal protection materials with the least amount of facility and process modification (i.e. a “drop-in” replacement).
- Possible implications of failure to develop a “drop-in” alternative would include: performance reduction, added vehicle weight, facility modifications, process changes, open-ended development, and stockpiling of traditional materials.
- NASA and Lockheed-Martin have qualified and validated four (4) new thermal protection materials which meet current EPA regulations. The qualification and validation process was established and concurred by the ED, EE, EH, and CR Laboratories at MSFC.

[Return to Chart](#)

Chart generated on
01/09/06

41



Qualification Activities



Testing Performed Throughout Qualification Activities

Several lots of material were tested to characterize the material variability and process repeatability.

Physical Properties	Mechanical Properties	Thermal Properties
Bond Tension (-423 to 300 °F)	Cryoflex (-423 & -320 °F)	Thermal Conductivity (-423 to 200 °F)
Flatwise Tension (-423 to 300 °F)	Monostrain (-423 to 400 °F)	Oxygen Index
Plug Pulls	Torsion Shear	Flammability
Density	Poisson Ratio	Specific Heat & TGA
Compression		Aero-recession (Hot Gas)
		Thermal-Vac

Major Flight Acceptance Tests: Wind Tunnel (aero-recession for ascent)
 Plasma Arc (Entry recession)
 PAL Ramps
 Aft Dome Test (Stop Sign)
 Combined Environments (combined lift-off environments)

[Return to Chart](#)

Chart generated on 01/09/06

42

Qualification Tests Compared		
CFC-11 FOAM QUALIFICATION	DESIGN REQUIREMENT	HCFC-141b FOAM QUALIFICATION
1. Initial process definition to bound process limits 2. Final process definition to develop database on material within scope of allowable parameters	Processability	1. Screening to verify processability within current processing limits 2. Same
1. Parametric evaluation of processing parameters 2. Performed testing using primarily laboratory subscale processing (low output sprays for acreage foam)	Database Development	1. Combinations of DOE and parametric evaluations 2. All qualification operations were conducted using full scale production processes at Michoud Assembly Facility
1. Bond tension (-423 to +300 °F) 2. Flatwise tension (-423 to +300 °F) 3. Cryoflex (Not used for ET 1; Implemented after ET 11) 4. Monostrain 5. Density/Compression 6. Thermal Conductivity (SRI) 7. TGA 8. O2 Index 9. Friability 10. Plug Pulls 11. Torsion Shear 12. Poisson's Ratio 13. Specific Heat 14. Flammability	Properties Evaluated	1. Same 2. Same 3. Gradient Cryoflex used for all materials 4. Same 5. Same 6. Improved Thermal Conductivity test at NIST (now at MSFC), Holometrix and at MAF 7. Same 8. Same 9. Same 10. Same 11. Same 12. Same 13. Same 14. Same
<i>Chart presented on 8/18/03</i>		
<i>Return to Chart</i> 43		



Qualification Tests Compared (cont.)




CFC-11 FOAM QUALIFICATION	DESIGN REQUIREMENT	HCFC-141b FOAM QUALIFICATION
1. Wind Tunnel (Ascent heating profiles) 2. Plasma Arc (Entry heating simulation) 3. Combined Environments 4. PAL Ramps (after STS-1) 5. Thermal Acoustic Profiles 6. Radiant - Vacuum 7. Thermal Vacuum (LOX Ogive backface heating simulation) 8. Mini-Tanks (10) 9. Flat Cryo Tanks 10. 10 ft. Tank (2) [primarily SLA test] 11. MPTA (BX-250 instead of CPR acreage foam) 12. STA 13. Not Applicable	Qualification Tests	1. Same 2. Same 3. Same 4. Same 5. Same 6. Same 7. Same 8. Satisfied using Cryoflex and Combined Env. Tests 9. Performed on NCFI 24-124 (See 13 below). Others satisfied with Therm. Cond., Cryoflex, and Combined Env. Tests 10. Satisfied using Cryoflex and Combined Env. Tests 11. Satisfied using Cryoflex and Combined Env. Tests 12. Satisfied using Cryoflex and Combined Env. Tests 13. Flat Tank test article thermal conductivity evaluation by differential temp measurements for comparison of CPR to NCFI
1. Off line Production Simulation evaluations using full-scale processing 2. Paper sprays on flight hardware with exposed areas on tank for testing or full scale mockups 3. Successful first article production application	Validation Tests	1. Not required since database development sprays were performed using full scale production process 2. Same (Two successful successive applications) 3. Same

Return to Chart
Chart generated on 01/09/03
dd


COLUMBIA

ACCIDENT INVESTIGATION BOARD

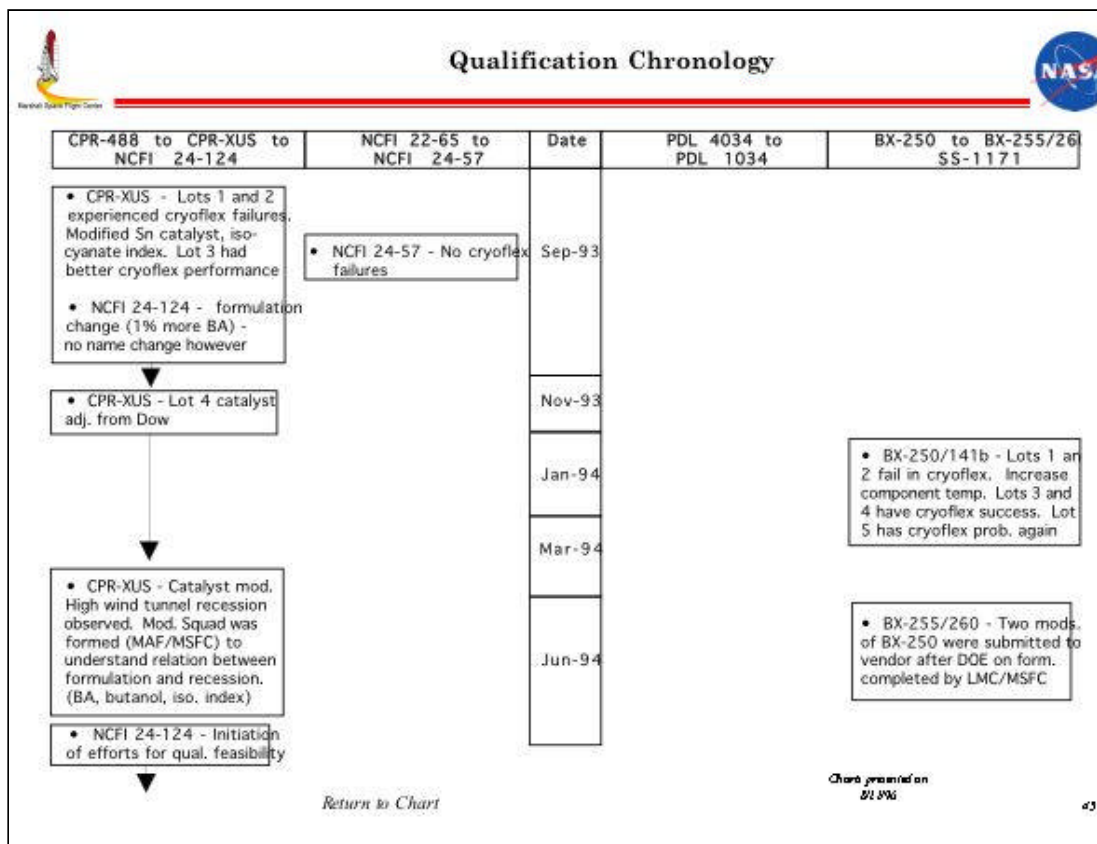

COLUMBIA

ACCIDENT INVESTIGATION BOARD

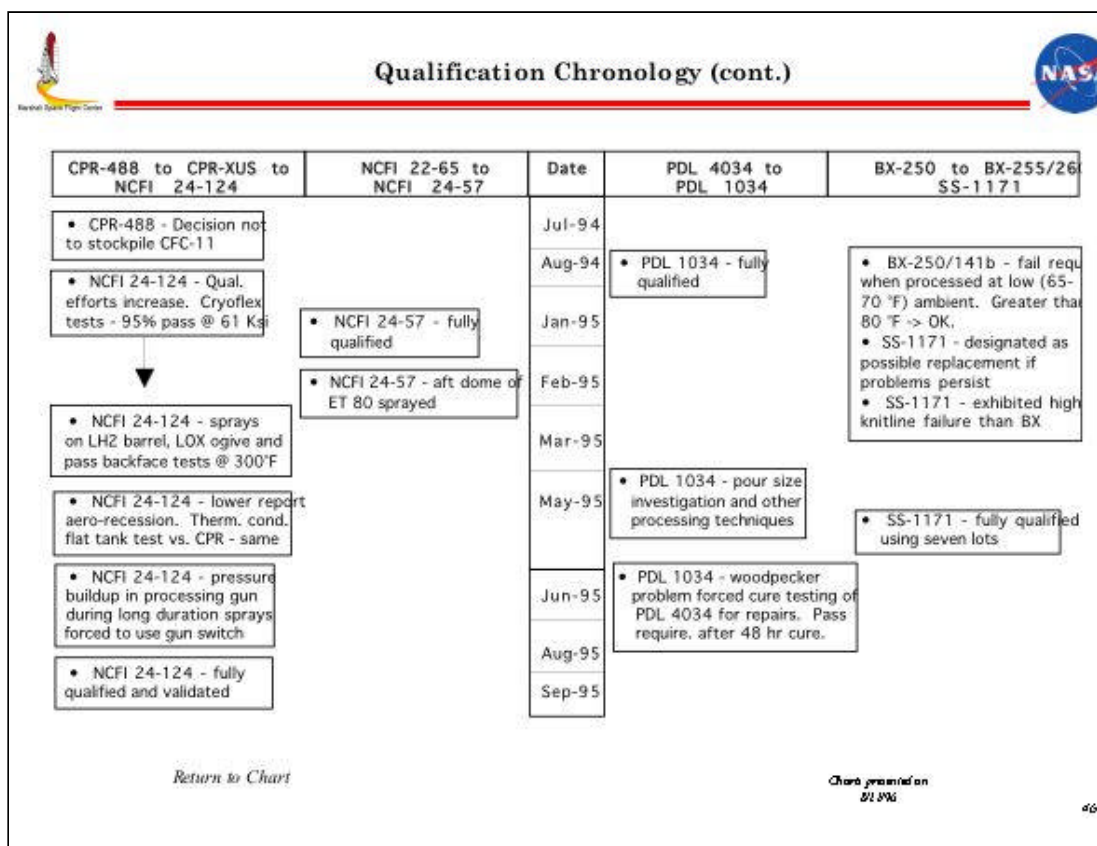

COLUMBIA

ACCIDENT INVESTIGATION BOARD



New TPS Flight Effectivities



NCFI 24-124	NCFI 24-57	PDL 1034	SS- 1171
ET 85 (5/15/97) LH2 sidewall ET 86 (7/17/97) LOX sidewall ET 88 (10/9/97) Intertank	ET 82 (9/12/96) LH2 aft dome (Process effectivity ET 80 and subsequent)	Components/closeouts as production permits Has been installed on closeout areas since ET 79 (6/20/96)	ET 82 (9/12/96) 3rd hardpoint closeout ET 85 (5/15/97) LH2 forward dome ET 87 (9/18/97) LOX aft dome

Return to Chart

*Chart generated on
01/09/06*

47



Summary

NCFI 24-124 - Developing new way of processing the tank due to the possibility of crushing due to walking loads. Includes worker awareness training and a new protection system for the tank. (First flight effectivity: ET85)

NCFI 24-57 - Ready to fly on ET 82 in September with no other processing issues at this time.


PDL 1034 - MAF is still using up reserve of PDL 4034 but will convert in September. KSC has been using PDL 1034. Vendor change is being investigated. (First flight effectivity was on ET79 which flew on 6/20/96)


SS-1171 - Have sprayed four (4) validation domes (ET 85 and 87) along with LOX tank manhole cover (ET 86). Ready to fly on ET82 3rd Hardpoint closeout.


Return to Chart

Chart generated on 01/09/96

48


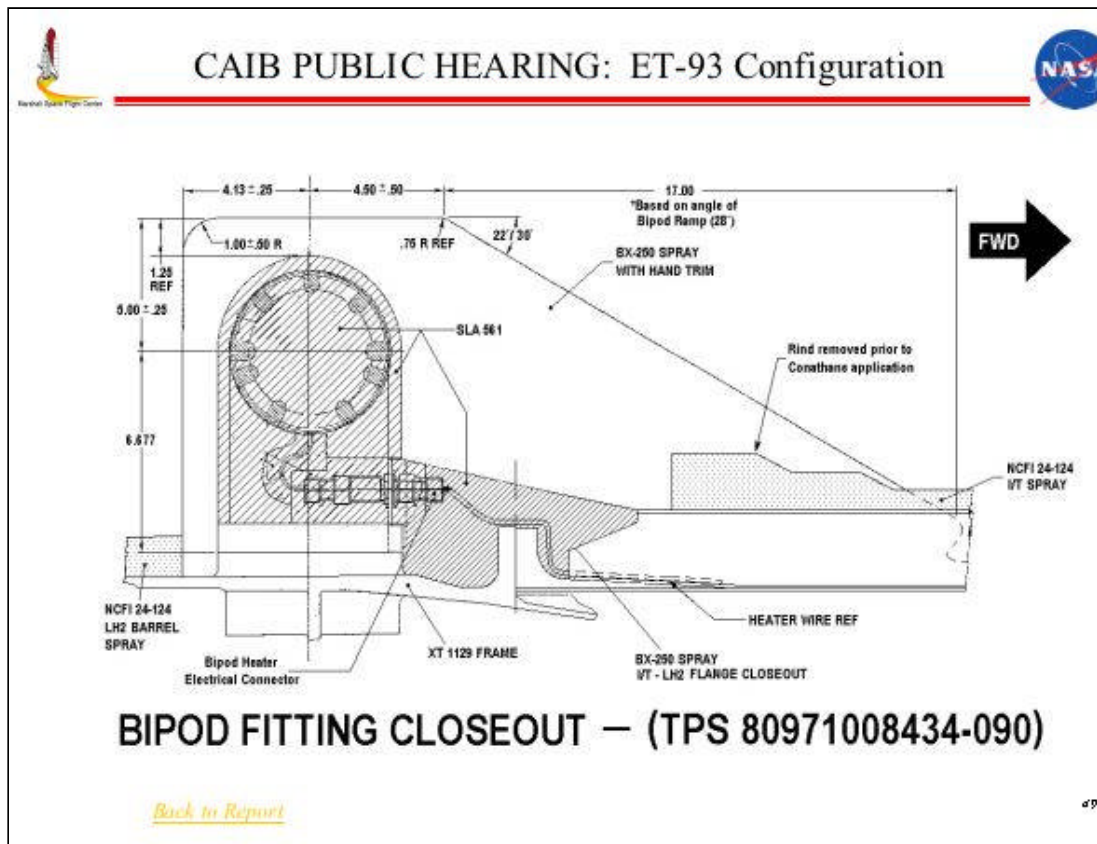


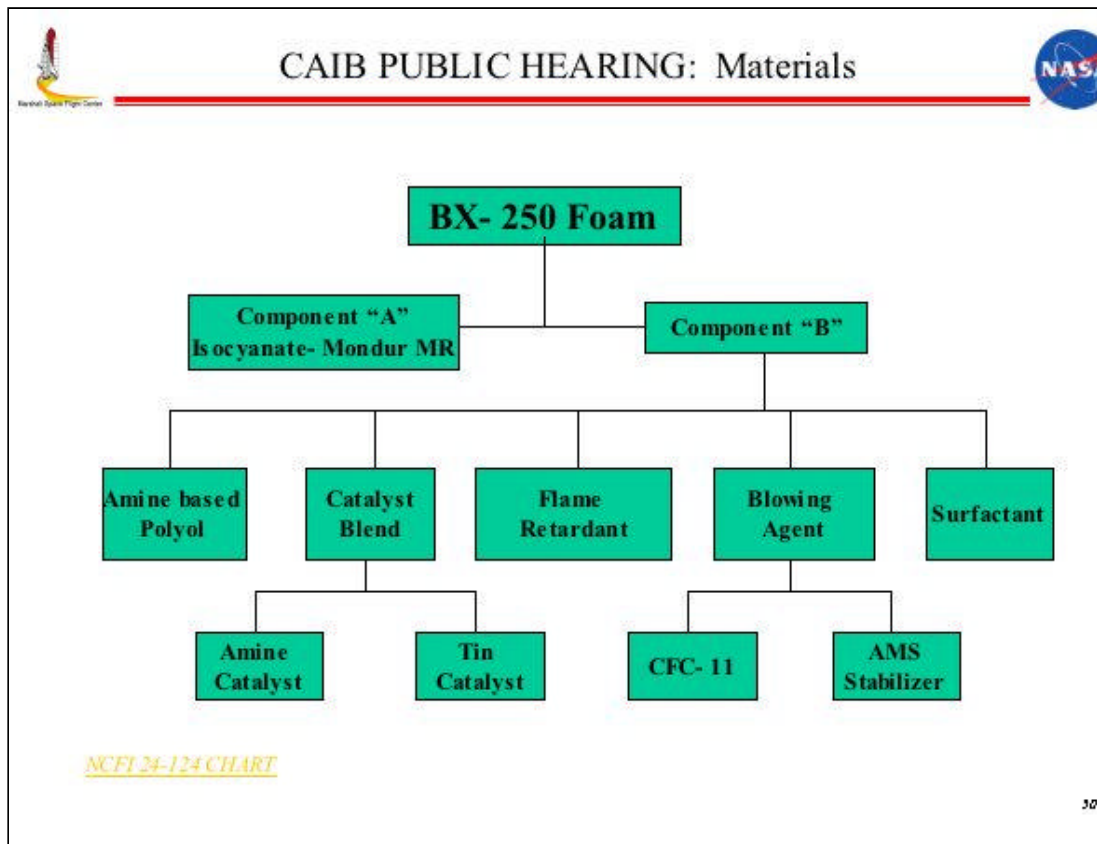

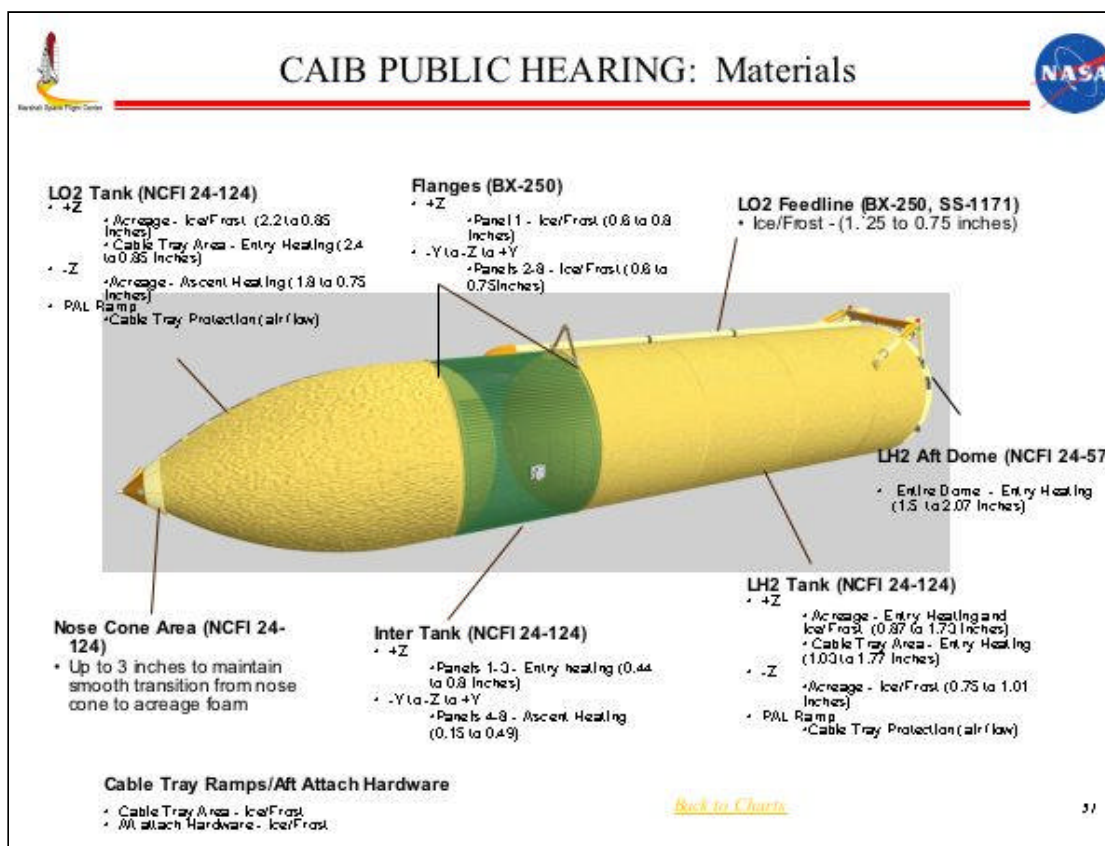



CAIB PUBLIC HEARING: Bipod Area Configuration

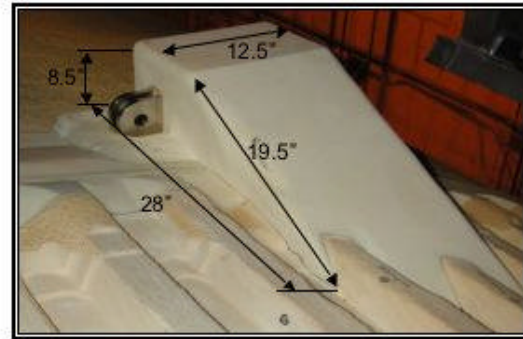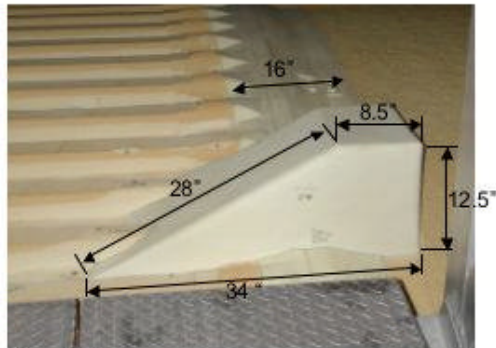

Bipod Ramp

Note: Dimensions from ET-121

- Estimated volume -1.1 cu. Ft.
- Estimated weight - 1.98 to 2.86 Lbs (1.8 to 2.6 lbs./cu.ft)

Flange Closeout



- Estimated volume/foot of length
 - Between bipod ramps (16" width) - 0.235 cu/ft per foot
 - Outboard of bipod ramps (12" width) - 0.177 cu/ft per foot
- Estimated volume
 - Between ramps - 0.42 to 0.61 lbs/ft (1.8 to 2.6 lbs./cu.ft)
 - Outboard of ramps - 0.32 to 0.46 lbs/ft (1.8 to 2.6 lbs./cu.ft)

[Back to Chart](#)

32



CAIB PUBLIC HEARING: ET-120 Dissected Ramp

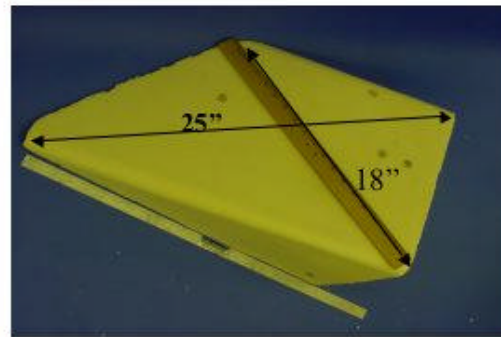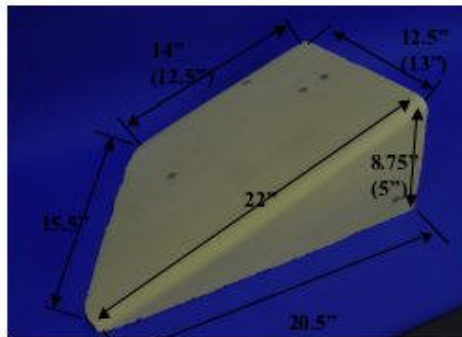

ET-120 Ramp From Dissection

- Measured Weight - 1.02 lbs

Photo Analysis Estimate of Impact Particle

- One of at least three particles seen leaving bipod area
- 24" (+3") x 15" (+3") - from camera E212
- 5" (+1") - from trajectory analysis
 - Volume estimate - 0.58 to 1.68 cu. Ft.
 - Estimated weight - 1.04 to 4.37 lbs. (1.8 to 2.6 lbs./cu.ft)

[Back to Chart](#)

53


	CAIB PUBLIC HEARING: History of Foam Loss	
	STS-7/ET-6 (launched 06/18/83) • Post separation film showed a large portion of the -Y(LH) bipod ramp missing • Lower surface Orbiter tile damage locations = 151 with 40 >1"	
	STS-32/ET-32 (launched 01/09/90) • Post separation film showed two divots measuring 12 to 14 inches between bipod and just above the flange and a third divot 14" in diameter centered between ramps and extending into the flange area measuring 28" wide. The third divot surrounded the forward part of the -Y(LH) bipod ramp • Lower surface Orbiter tile damage locations = 111 with 13 >1" – Largest damage: 2.0" x 3.0" x 0.5"D (Right side of Orbiter, aft of the forward Main Landing Gear)	
	STS-35/ET-35 (launched 12/02/90) • Ten circular TPS divots in the Intertank to Hydrogen tank flange closeout (ranging 8 to 10") • Lower surface Orbiter tile damage locations = 132 with 15 >1" – Largest damage: 5.75" x 3.75" x 0.25"D (Right side of Orbiter, aft of forward Main Landing Gear)	

3d




CAIB PUBLIC HEARING: History of Foam Loss



	STS-50 / ET-50 (launched 06/25/92) • Post separation film (umbilical camera) showed ~ 60 percent of the -Y (LH) bipod ramp closeout was missing - Damage area measured approximately 26 x 10 inches in size and was deep enough to expose SLA closeout • Lower surface Orbiter tile damage locations = 141 with 28 >1" - Largest damage: 9" x 4.5" x 0.5" (Left wing of Orbiter, three feet outboard of the LH2 umbilical)
	STS-52 / ET-55 (launched 10/22/92) • Post separation film (umbilical camera) showed missing outboard rear corner of the -Y (LH) bipod ramp closeout - Damage area measured approximately 4" X 5" X 12" exposing SLA closeout • Lower surface Orbiter tile damage locations = 152 with 6 >1" - Largest damage: 1.4" x 0.7" x 0.2" (center of body flap)
	STS-112/ET-115 (launched 10/07/02) • Debris impacted the LH SRB ETA ring at approximately 30 seconds after launch - Origin of debris not seen in launch film - Post separation film (umbilical camera) showed an area of missing foam on the -Y bipod ramp (~ 4" X 5" X 12") exposing SLA closeout • Lower surface Orbiter tile damage locations = 81 with 22 > 1" - Largest damage (2 locations): 4.5" x 1.5" x 0.125"D (Right side of Orbiter, forward of the rear Main Landing Gear and inboard of the rear Main Landing Gear)

2

33

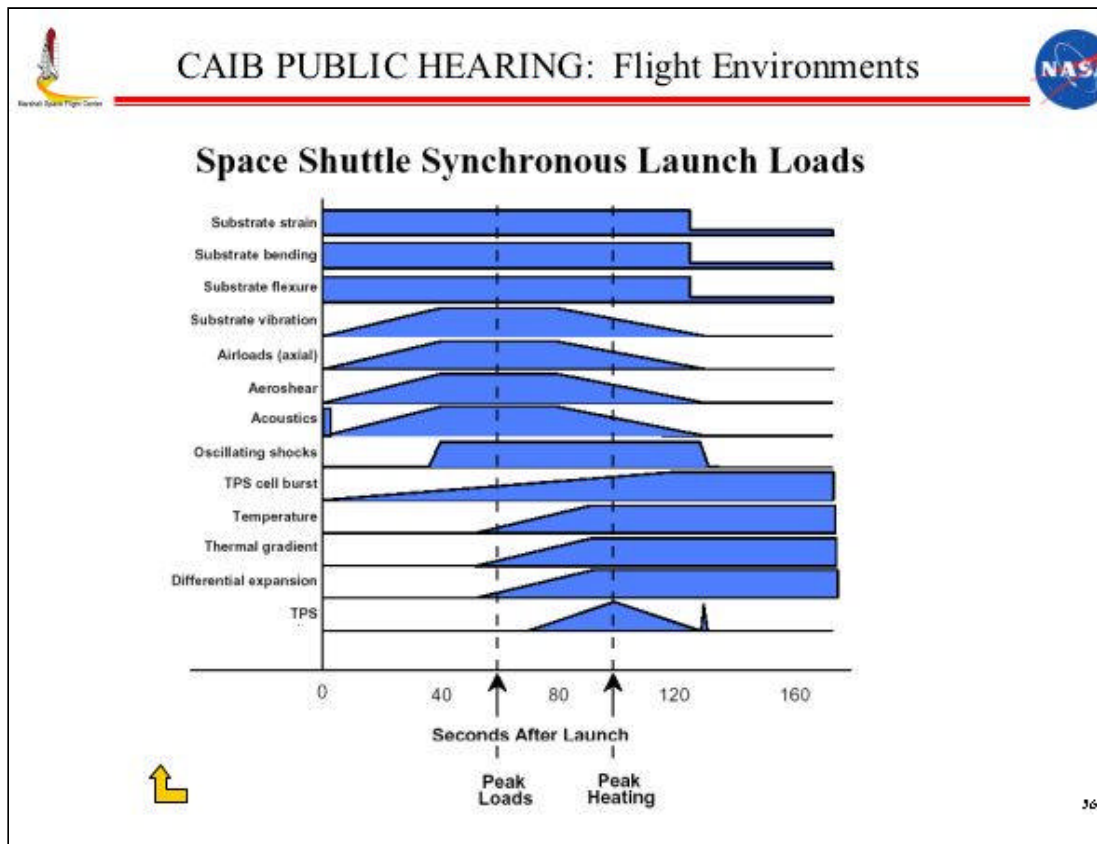




CAIB PUBLIC HEARING: NDE Correlation +Y Bipod



- ET120 +Y Bipod Results

- Several indications noted post wedge removal which may be attributable to complex part geometry, density gradients, or defects
- Dissection revealed no significant correlation between indicated regions and subsurface defects

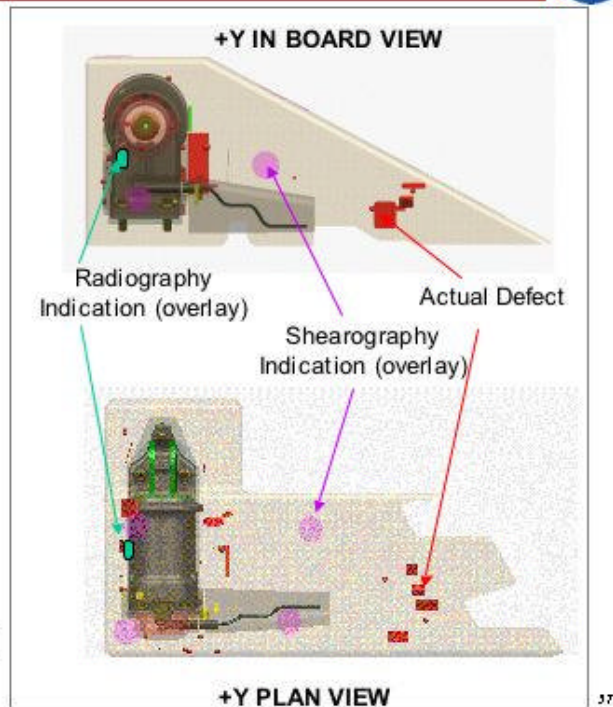

57




CAIB PUBLIC HEARING: NDE Correlation -Y Bipod



- ET120 -Y Bipod Results
 - Several indications were noted pre and post wedge removal which may be attributable to complex part geometry, density gradients, or defects

-Y Ramp Looking Top Down

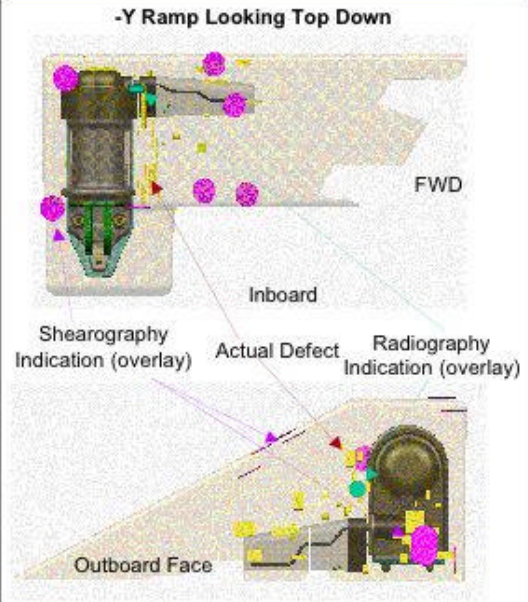

-Y Ramp Looking Outboard In

58

April 7, 2003 Presentations

☐	☒ Privacy Policy	DISCLAIMER	☒ Accessibility	☐
--------------------------	--	------------	---	--------------------------